




INSTALLATION


Able to install to either T-Bar or gypsum ceiling.



FL-UP&DOWN

Up&Down Pendant Fluorescent Light


Optional LED Replacement

 **LED T8 / G13**
 LED 8W replace T8-18W
 LED 16W replace T8-36W


Fitting Information

- Made of high quality cold-rolled steel of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.
- Anodized aluminium lover for anti-glare purpose
- 99.85% high purity anodized aluminium reflector with Total Reflectance of 87% (87)
- Spring lock type louver for ease of maintenance
- Provide both up light and down light distribution

ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SFB 128 UND	1 x 28 W T5	1220	65	110	-
FL-SFB 228 UND	2 x 28 W T5	1220	65	110	-
FL-SFB 216 UND	2 x 16 W T8 LED	1220	65	110	-



Optional LED Replacement


 **LED T8 / G13**
 LED 8W replace T8-18W
 LED 16W replace T8-36W

FL-SLIM-S

Pendant Slim Acrylic Fluorescent Light


Fitting Information

- Made of high quality cold-rolled steel of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.
- Opal Acrylic Diffuser for smooth light distribution



ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SFB 128 SLM	1 x 28 W T5	1190	85	120	-
FL-SFB 228 SLM	2 x 28 W T5	1190	85	120	-
FL-SFB 116 SLM	1 x 16 W T8 LED	1190	85	120	-



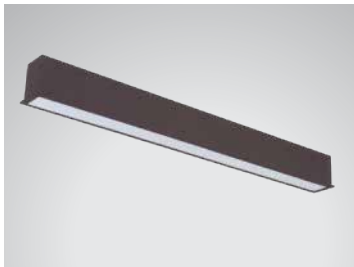

FL-SLIM-R


Recessed Slim Acrylic Fluorescent Light

Optional LED Replacement

	LED T8 / G13 LED 8W replace T8-18W LED 16W replace T8-36W
---	--

Fitting Information


- Made of high quality cold-rolled steel of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.

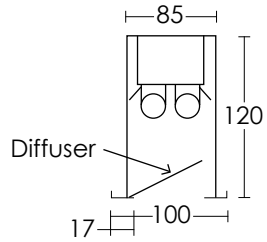

Diffuser

- Opal Acrylic Diffuser for smooth light distribution

ART NO.	TYPE	DIMENSION (mm.)					Cut out (mm.)
		L1	L2	W1	W2	H	
FL-FFB 128 SLM	1 x 28 W T5	1190	1170	100	85	120	-
FL-FFB 228 SLM	2 x 28 W T5	1190	1170	100	85	120	-
FL-FFB 116 SLM	1 x 16 W T8 LED	1190	1170	100	85	120	-



FL-ARROW-C


Pendant Louver Fluorescent Light

Optional LED Replacement

	LED T8 / G13 LED 8W replace T8-18W LED 16W replace T8-36W
---	--

Fitting Information


- Made of high quality cold-rolled steel sheet of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.

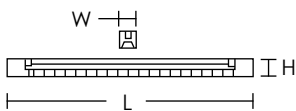


Reflector & Louver

- 99.85% high-purity pre-anodized aluminium parabolic louver mirror finished for longitudinal. Total Reflectance 87% (DIN 3036-2).
- Spring-lock type louver for ease of maintenance.


ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SFB 128 ARC	1 x 28 W T5	1380	90	90	-
FL-SFB 218 ARC	2 x 28 W T5	1380	110	130	-
FL-SFB 116 ARC	1 x 16 W T8 LED	1380	110	130	-
FL-SFB 216 ARC	2 x 16 W T8 LED	1380	130	130	-



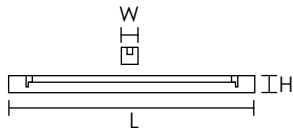


FL-ARROW-P

Pendent Acrylic Fluorescent Light



Optional LED Replacement

LED 8W replace T8-18W
LED 16W replace T8-36W




Fitting Information


- Made of high quality cold-rolled steel of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.
- Anodized aluminium lover for anti-glare purpose

Diffuser

- 99.85% high purity anodized aluminium reflector with Total Reflectance of 87% (87) for normal usage.
- Opal Acrylic diffuser for smooth light distribution




ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SFB 128 ARP	1 x 28 W T5	1380	90	90	-
FL-SFB 228 ARP	2 x 28 W T5	1380	110	130	-
FL-SFB 116 ARP	1 x 16 W T8 LED	1380	110	130	-
FL-SFB 216 ARP	2 x 16 W T8 LED	1380	130	130	-

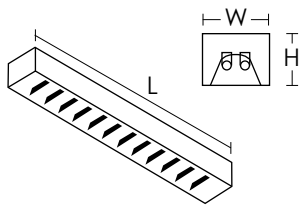


FL-LINE-S

Pendent Louver Fluorescent Light



Optional LED Replacement

LED 8W replace T8-18W
LED 16W replace T8-36W




Fitting Information

- Made of high quality cold-rolled steel of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.

Reflector & Louver

- 99.85% high purity anodized aluminium reflector with Total Reflectance of 87% (87) for normal usage.
- Spring-lock type louver for ease of maintenance.



ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SFB 136 LINE	1 x 36 W T8	1245	120	130	-
FL-SFB 236 LINE	2 x 36 W T8	1245	150	130	-
FL-SFB 128 LINE	1 x 28 W T5	1200	90	90	-
FL-SFB 228 LINE	2 x 28 W T5	1200	100	130	-
FL-SFB 216 LINE	2 x 16 W T8 LED	1245	150	130	-



FL-LINE-R

Recessed Louver Fluorescent Light


Optional LED Replacement



LED T8 / G13
LED 8W replace T8-18W
LED 16W replace T8-36W

Fitting Information

- Made of high quality cold-rolled steel of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.

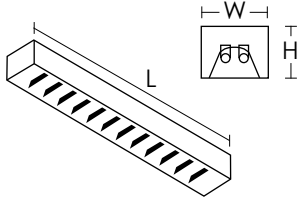

Reflector & Louver

- 99.85% high purity anodized aluminium reflector with Total Reflectance of 87% (87) for normal usage.
- Spring-lock type louver for ease of maintenance.



ART NO.	TYPE	DIMENSION (mm.)					Cut out (mm.)
		L1	L2	W1	W2	H	
FL-FFB 136 LNE	1 x 36 W T8	1270	1245	150	120	130	-
FL-FFB 236 LNE	2 x 36 W T8	1270	1245	180	150	130	-
FL-FFB 128 LNE	1 x 28 W T5	1195	1170	120	90	130	-
FL-FFB 228 LNE	2 x 28 W T5	1195	1170	130	100	130	-
FL-FFB 216 LNE	2 x 16 W T8 LED	1270	1245	180	150	130	-



FL-MATCH-S

Pendent Downlight & Fluorescent Light


Optional LED Replacement



LED T8 / G13
LED 8W replace T8-18W
LED 16W replace T8-36W


Fitting Information

- Made of high quality cold-rolled steel sheet of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.

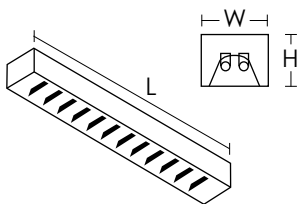


Reflector & Louver

- 99.85% high-purity pre-anodized aluminium parabolic louver mirror finished for longitudinal. Total Reflectance 87% (DIN 3036-2).
- QR111 (G53) downlight for decorative lighting (Other downlights are applicable upon requested)
- Spring-lock type louver for ease of maintenance.



ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SFB 136 MAT	1 x 36 W T8	1480	170	140	-
FL-SFB 236 MAT	2 x 36 W T8	1480	170	140	-
FL-SFB 128 MAT	1 x 28 W T5	1480	170	140	-
FL-SFB 228 MAT	2 x 28 W T5	1480	170	140	-
FL-SFB 216 MAT	2 x 16 W T8 LED	1480	170	140	-

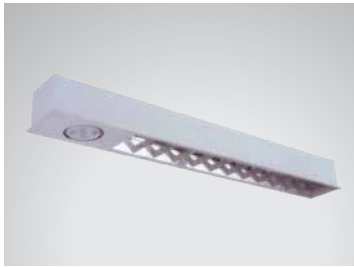

FL-MATCH-R

Recessed Downlight & Fluorescent Light

Optional LED Replacement




LED T8 / G13
LED 8W replace T8-18W
LED 16W replace T8-36W

Fitting Information

- Made of high quality cold-rolled steel of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.

Reflector & Louver

- 99.85% high purity anodized aluminium reflector with Total Reflectance of 87% (87) for normal usage.
- QR111 (G53) downlight for decorative lighting (Other downlight are application upon requested.)
- Spring-lock type louver for ease of maintenance.

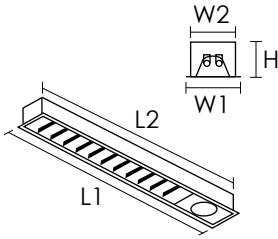

ART NO.	TYPE	DIMENSION (mm.)					Cut out (mm.)
		L1	L2	W1	W2	H	
FL-FFB 136 MAT	1 x 36 W T8	1505	1480	195	154	140	-
FL-FFB 236 MAT	2 x 36 W T8	1505	1480	195	154	140	-
FL-FFB 128 MAT	1 x 28 W T5	1505	1480	195	154	140	-
FL-FFB 228 MAT	2 x 28 W T5	1505	1480	195	154	140	-
FL-FFB 216 MAT	2 x 16 W T8 LED	1505	1480	195	154	140	-



FL-FRAME

Recessed Downlight & Fluorescent Light

Optional LED Replacement





LED T8 / G13
LED 8W replace T8-18W
LED 16W replace T8-36W

Fitting Information

- Made of high quality cold-rolled steel of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.

Diffuser

- Dual QR111 downlight on both end (Optional : other downlight are available upon request)
- Opal Acrylic Diffuser for smooth light distribution

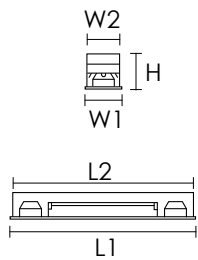


ART NO.	TYPE	DIMENSION (mm.)					Cut out (mm.)
		L1	L2	W1	W2	H	
FL-FFB 136 FRM	1 x 36 W T5	1646	1622	206	180	140	-
FL-FFB 236 FRM	2 x 36 W T5	1646	1622	206	180	140	-
FL-FFB 128 FRM	1 x 28 W T5	1626	1602	206	180	140	-
FL-FFB 228 FRM	2 x 28 W T5	1626	1602	206	180	140	-
FL-FFB 216 FRM	2 x 16 W T8 LED	1646	1622	206	180	140	-



INSTALLATION

Able to install to either T-Bar or gypsum ceiling



FL-WING

Surface Mounted Fluorescent Light

Fitting Information

- Made of high quality cold-rolled steel sheet of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.



Optional LED Replacement



LED T8 / G13

LED 8W replace T8-18W
LED 16W replace T8-36W

ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SBO 208 WNG	2 x 8 W T8 LED	630	295	115	-
FL-SBO 216 WNG	2 x 16 W T8 LED	1240	295	115	-
FL-SBO 214 WNG	2 x 14 W T5	615	295	115	-
FL-SBO 228 WNG	1 x 28 W T5	1200	295	115	-
FL-SBO 136 WNG PLL	1 x 36 W PLL	500	295	115	-
FL-SBO 236 WNG PLL	2 x 36 W PLL	500	295	115	-

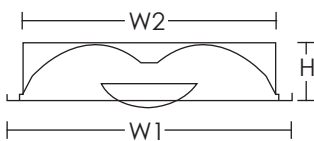

FL-CURVE

Recessed T-Bar and Gypsum Fluorescent Light

Fitting Information

- Made of high quality cold-rolled steel sheet of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.


Optional LED Replacement



LED T8 / G13

LED 8W replace T8-18W
LED 16W replace T8-36W


ART NO.	TYPE	DIMENSION (mm.)						Cut out (mm.)
		L1	L2	W1	W2	H		
FL-T&F0 208 CR1V	2 x 8 W T8 LED	595	615	595	425	115	575x575	
FL-T&F0 216 CR1V	2 x 16 W T8 LED	1195	1222	595	425	115	1175x575	
FL-T&F0 214 CR1V	2 x 14 W T5	595	565	595	565	115	575x575	
FL-T&F0 228 CR1V	2 x 28 W T5	1195	1170	595	565	115	1180x575	





INSTALLATION

Able to install to either T-Bar or gypsum ceiling.



FL-TF-T8

Recessed T-Bar and Gypsum T8 Fluorescent Light

Optional LED Replacement


LED T8 / G13
 LED 8W replace T8-18W
 LED 16W replace T8-36W

Fitting Information

Steel sheet thickness 0.6, 0.8 mm.
 Lamp : Fluorescent 18, 36W
 Socket : G13 (Rotary spring-locked)
 Five-stage zinc-phosphate pretreatment for rust resistance.
 Finished with white polyester powder by two-stage electrostatic method and baked enamel.

Reflector & Louver

- 99.85% high-purity pre-anodized aluminium parabolic louver mirror finished for longitudinal. Total Reflectance 87% (DIN 5036-2).
- Profile aluminium for transversal to anti-glare with 5 standard cross blades for the 18w and 12 cross blades for the 36w.
- Head-opened louver.



ART NO.	TYPE	DIMENSION (mm.)					Cut out (mm.)
		L1	L2	W1	W2	H	
FL-TF 118 CR	1 x 18 W T8	595	620	200	170	90	165 x 575
FL-TF 118 CBR	1 x 18 W T8	595	620	295	265	90	275 x 575
FL-TF 218 CR	2 x 18 W T8	595	620	295	265	90	275 x 575
FL-TF 218 CBR	2 x 18 W T8	595	620	595	565	90	575 x 575
FL-TF 318 CR	3 x 18 W T8	595	620	595	565	90	575 x 575
FL-TF 418 CR	4 x 18 W T8	595	620	595	565	90	575 x 575
FL-TF 136 CR	1 x 36 W T8	1195	1222	200	170	90	165 x 1175
FL-TF 136 CBR	1 x 36 W T8	1195	1222	295	265	90	275 x 1175
FL-TF 236 CR	2 x 36 W T8	1195	1222	295	265	90	275 x 1175
FL-TF 236 CBR	2 x 36 W T8	1195	1222	595	565	90	575 x 1175
FL-TF 336 CR	3 x 36 W T8	1195	1222	595	565	90	575 x 1175
FL-TF 436 CR	4 x 36 W T8	1195	1222	595	565	90	575 x 1175



FL-SB-T8

Surface Mounted T8 Fluorescent Light

Optional LED Replacement



LED T8 / G13
 LED 8W replace T8-18W
 LED 16W replace T8-36W

Fitting Information

Steel sheet thickness 0.6, 0.8 mm.
 Lamp : Fluorescent 18, 36W
 Socket : G13 (Rotary spring-locked)
 Five-stage zinc-phosphate pretreatment for rust resistance.
 Finished with white polyester powder by two-stage electrostatic method and baked enamel.

Reflector & Louver


- 99.85% high-purity pre-anodized aluminium parabolic louver mirror finished for longitudinal. Total Reflectance 87% (DIN 5036-2).
- Profile aluminium for transversal to anti-glare with 5 standard cross blades for the 18w and 12 cross blades for the 36w.
- Head-opened louver.



ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SB 118 CR	1 x 18 W T8	615	200	95	-
FL-SB 118 CBR	1 x 18 W T8	615	295	95	-
FL-SB 218 CR	2 x 18 W T8	615	295	95	-
FL-SB 218 CBR	2 x 18 W T8	615	595	95	-
FL-SB 318 CR	3 x 18 W T8	615	595	95	-
FL-SB 418 CR	4 x 18 W T8	615	595	95	-
FL-SB 136 CR	1 x 36 W T8	1222	200	95	-
FL-SB 136 CBR	1 x 36 W T8	1222	295	95	-
FL-SB 236 CR	2 x 36 W T8	1222	295	95	-
FL-SB 236 CBR	2 x 36 W T8	1222	595	95	-
FL-SB 336 CR	3 x 36 W T8	1222	595	95	-
FL-SB 436 CR	4 x 36 W T8	1222	595	95	-



INSTALLATION
Able to install to either T-Bar or gypsum ceiling



FL-TF-T8P

Recessed T-Bar and Gypsum T8 Fluorescent Light

Optional LED Replacement


LED T8 / G13
LED 8W replace T8-18W
LED 16W replace T8-36W

Fitting Information

Steel sheet thickness 0.6, 0.8 mm.
Lamp : Fluorescent 18, 36W
Socket : G13 (Rotary spring-locked) / Spring load type lampholder
Five-stage zinc-phosphate pretreatment for rust resistance.
Finished with white polyester powder by two-stage electrostatic method and baked enamel.

Diffuser

• High quality acrylic diffuser : Prismatic / Opal / Stipple / Clear.



ART NO.	TYPE	DIMENSION (mm.)					Cut out (mm.)
		L1	L2	W1	W2	H	
FL-TFB 118 P	1 x 18 W T8	595	636	200	154	115	-
FL-TFB 118 PB	1 x 18 W T8	595	636	295	249	115	-
FL-TFB 218 P	2 x 18 W T8	595	636	295	249	115	-
FL-TFB 218 PB	2 x 18 W T8	595	636	595	549	115	-
FL-TFB 318 P	3 x 18 W T8	595	636	595	549	115	-
FL-TFB 418 P	4 x 18 W T8	595	636	595	549	115	-
FL-TFB 136 P	1 x 36 W T8	1195	1243	200	154	115	-
FL-TFB 136 PB	1 x 36 W T8	1195	1243	295	249	115	-
FL-TFB 236 P	2 x 36 W T8	1195	1243	295	249	115	-
FL-TFB 236 PB	2 x 36 W T8	1195	1243	595	549	115	-
FL-TFB 336 P	3 x 36 W T8	1195	1243	595	549	115	-
FL-TFB 436 P	4 x 36 W T8	1195	1243	595	549	115	-



FL-SFB-T8

Surface Mounted T8 Prismatic Luminaire

Optional LED Replacement



LED T8 / G13
LED 8W replace T8-18W
LED 16W replace T8-36W

Fitting Information

Steel sheet thickness 0.6, 0.8 mm.
Lamp : Fluorescent 18, 36W
Socket : G13 (Rotary spring-locked) / Spring load type lampholder
Five-stage zinc-phosphate pretreatment for rust resistance.
Finished with white polyester powder by two-stage electrostatic method and baked enamel.

Diffuser

• High quality acrylic diffuser : Prismatic / Opal / Stipple / Clear.




ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SFB 118 P	1 x 18 W T8	615	200	82	-
FL-SFB 118 PB	1 x 18 W T8	615	295	82	-
FL-SFB 218 P	2 x 18 W T8	615	295	82	-
FL-SFB 218 PB	2 x 18 W T8	615	595	82	-
FL-SFB 318 P	3 x 18 W T8	615	595	82	-
FL-SFB 418 P	4 x 18 W T8	615	595	82	-
FL-SFB 136 P	1 x 36 W T8	1222	200	82	-
FL-SFB 136 PB	1 x 36 W T8	1222	295	82	-
FL-SFB 236 P	2 x 36 W T8	1222	295	82	-
FL-SFB 236 PB	2 x 36 W T8	1222	595	82	-
FL-SFB 336 P	3 x 36 W T8	1222	595	82	-
FL-SFB 436 P	4 x 36 W T8	1222	595	82	-



INSTALLATION

Able to install to either T-Bar or gypsum ceiling



FL-TF-T5

Recessed T-Bar and Gypsum T5 Fluorescent Light

Fitting Information

Steel sheet thickness 0.6, 0.8 mm.

Lamp : Fluorescent T5 14, 28W


Socket : G5 (Rotary spring-locked)

Five-stage zinc-phosphate pretreatment for rust resistance.

Finished with white polyester powder by two-stage electrostatic method and baked enamel.

Reflector & Louver

- 99.85% high-purity pre-anodized aluminium parabolic louver mirror finished for longitudinal. Total Reflectance 87% (DIN 3036-2).
- Profile aluminium for transversal to anti-glare with 5 standard cross blades for the 14w and 12 cross blades for the 28w.
- Head-opened louver.



ART NO.	TYPE	DIMENSION (mm.)					Cut out (mm.)
		L1	L2	W1	W2	H	
FL-TF 114 CR	1 x 14 W T5	570	595	200	170	65	165 x 575
FL-TF 114 CBR	1 x 14 W T5	570	595	295	265	65	275 x 575
FL-TF 214 CR	2 x 14 W T5	570	595	295	265	65	275 x 575
FL-TF 214 CBR	2 x 14 W T5	570	595	595	565	65	575 x 575
FL-TF 314 CR	3 x 14 W T5	570	595	595	565	65	575 x 575
FL-TF 414 CR	4 x 14 W T5	570	595	595	565	65	575 x 575
FL-TF 128 CR	1 x 28 W T5	1170	1195	200	170	65	165 x 1175
FL-TF 128 CBR	1 x 28 W T5	1170	1195	295	265	65	275 x 1175
FL-TF 228 CR	2 x 28 W T5	1170	1195	295	265	65	275 x 1175
FL-TF 228 CBR	2 x 28 W T5	1170	1195	595	565	65	575 x 1175
FL-TF 328 CR	3 x 28 W T5	1170	1195	595	565	65	575 x 1175
FL-TF 428 CR	4 x 28 W T5	1170	1195	595	565	65	575 x 1175



FL-SB-T5

Surface Mounted T5 Fluorescent Light

Fitting Information

Steel sheet thickness 0.6, 0.8 mm.

Lamp : Fluorescent T5 14, 28W



Socket : G5 (Rotary spring-locked)

Five-stage zinc-phosphate pretreatment for rust resistance.

Finished with white polyester powder by two-stage electrostatic method and baked enamel.

Reflector & Louver

- 99.85% high-purity pre-anodized aluminium parabolic louver mirror finished for longitudinal. Total Reflectance 87% (DIN 3036-2).
- Profile aluminium for transversal to anti-glare with 5 standard cross blades for the 14w and 12 cross blades for the 28w.
- Head-opened louver.




ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SB 114 CR	1 x 14 W T5	595	200	65	-
FL-SB 114 CBR	1 x 14 W T5	595	295	65	-
FL-SB 214 CR	2 x 14 W T5	595	295	65	-
FL-SB 214 CBR	2 x 14 W T5	595	595	65	-
FL-SB 314 CR	3 x 14 W T5	595	595	65	-
FL-SB 414 CR	4 x 14 W T5	595	595	65	-
FL-SB 128 CR	1 x 28 W T5	1200	200	65	-
FL-SB 128 CBR	1 x 28 W T5	1200	295	65	-
FL-SB 228 CR	2 x 28 W T5	1200	295	65	-
FL-SB 228 CBR	2 x 28 W T5	1200	595	65	-
FL-SB 328 CR	3 x 28 W T5	1200	595	65	-
FL-SB 428 CR	4 x 28 W T5	1200	595	65	-



INSTALLATION

Able to install to either T-Bar or gypsum ceiling.



FL-TFP-T5

Recessed T-Bar and Gypsum T5 Prismatic Luminaire

Fitting Information

Steel sheet thickness 0.6, 0.8 mm.

Lamp : Fluorescent T5 14, 28W

Socket : G5 (Rotary spring-locked) / Spring load type lampholder

Five-stage zinc-phosphate pretreatment for rust resistance.

Finished with white polyester powder by two-stage electrostatic method and baked enamel.

Diffuser

- High quality acrylic diffuser : Prismatic / Opal / Stipple / Clear.



ART NO.	TYPE	DIMENSION (mm.)					Cut out (mm.)
		L1	L2	W1	W2	H	
FL-TF 114 P	1 x 14 W T5	570	595	200	170	65	165 x 575
FL-TF 114 PB	1 x 14 W T5	570	595	295	265	65	275 x 575
FL-TF 214 P	2 x 14 W T5	570	595	295	265	65	275 x 575
FL-TF 214 PB	2 x 14 W T5	570	595	595	565	65	575 x 575
FL-TF 314 P	3 x 14 W T5	570	595	595	565	65	575 x 575
FL-TF 414 P	4 x 14 W T5	570	595	595	565	65	575 x 575
FL-TF 128 P	1 x 28 W T5	1170	1195	200	170	65	165 x 1175
FL-TF 128 PB	1 x 28 W T5	1170	1195	295	265	65	275 x 1175
FL-TF 228 P	2 x 28 W T5	1170	1195	295	265	65	275 x 1175
FL-TF 228 PB	2 x 28 W T5	1170	1195	595	565	65	575 x 1175
FL-TF 328 P	3 x 28 W T5	1170	1195	595	565	65	575 x 1175
FL-TF 428 P	4 x 28 W T5	1170	1195	595	565	65	575 x 1175



FL-SBP-T5

Surface Mounted T5 Prismatic Luminaire

Fitting Information

Steel sheet thickness 0.6, 0.8 mm.

Lamp : Fluorescent T5 14, 28W


Socket : G5 (Rotary spring-locked) / Spring load type lampholder

Five-stage zinc-phosphate pretreatment for rust resistance.


Finished with white polyester powder by two-stage electrostatic method and baked enamel.

Diffuser


- High quality acrylic diffuser : Prismatic / Opal / Stipple / Clear.



ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SB 114 P	1 x 14 W T5	595	200	81	-
FL-SB 114 PB	1 x 14 W T5	595	295	81	-
FL-SB 214 P	2 x 14 W T5	595	295	81	-
FL-SB 214 PB	2 x 14 W T5	595	595	81	-
FL-SB 314 P	3 x 14 W T5	595	595	81	-
FL-SB 414 P	4 x 14 W T5	595	595	81	-
FL-SB 128 P	1 x 28 W T5	1200	200	81	-
FL-SB 128 PB	1 x 28 W T5	1200	295	81	-
FL-SB 228 P	2 x 28 W T5	1200	295	81	-
FL-SB 228 PB	2 x 28 W T5	1200	595	81	-
FL-SB 328 P	3 x 28 W T5	1200	595	81	-
FL-SB 428 P	4 x 28 W T5	1200	595	81	-

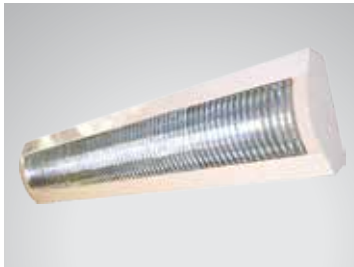

INSTALLATION
Surface Mounted.

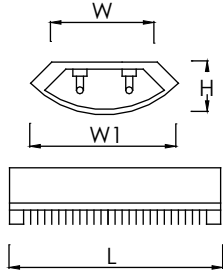

FL-PLF5

Plastic Louver Fluorescent

Fitting Information

Steel sheet thickness 0.6 mm.

Lamp : LED T8 8W, 16W

Socket : G 13 (Rotary spring-locked)

Five-stage zinc-phosphate pretreatment for rust resistance.

Finished with white polyester powder by two-stage electrostatic method and baked enamel.


Optional LED Replacement




LED T8 / G13
LED 8W replace T8-18W
LED 16W replace T8-36W

Reflector & Louver

- 99.85% purity anodized aluminium reflector to provide total reflectance 87% mirror finished (AL)
- ABS Plastic Injection Louver.
- Louver Color : White / Silver.



ART NO.	TYPE	DIMENSION (mm.)				Cut out (mm.)
		L	W	W1	H	
FL-PLF5-108	1 X 8 W LED T8	655	185	210	65	-
FL-PLF5-208	2 X 8 W LED T8	655	185	210	65	-
FL-PLF5-116	1 X 16 W LED T8	1250	185	210	65	-
FL-PLF5-216	2 X 16 W LED T8	1250	185	210	65	-

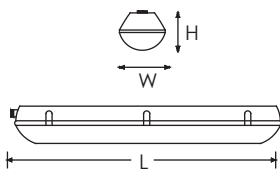

FL-PE

Weather Pack Luminaire

Fitting Information

Lamp : LED T8 8W, 16W

Socket : G13 (Rotary spring-locked).

IP Rating : IP65


Optional LED Replacement



LED T8 / G13
LED 8W replace T8-18W
LED 16W replace T8-36W

Specification


- Gray shockproof ABS.
- Polycarbonate anti-UV diffuser cover.



ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-PE 1/8 WR	1 x 8 W LED T8	675	98	100	-
FL-PE 2/8 WR	2 x 8 W LED T8	675	156	100	-
FL-PE 1/16 WR	1 x 16 W LED T8	1280	98	100	-
FL-PE 2/16 WR	2 x 16 W LED T8	1280	156	100	-



INSTALLATION
Surface Mounted.



FL-T5 Fluorescent Light With Cover


Linkable Fluorescent Light With Cover

Fitting Information

Lamp : T5 Fluorescent 8W, 14W, 21W, 28W
 Socket : G5 (Rotary spring-locked)
 Ballast : Build-in electronic Ballast
 Cover : Plastic Cover
 Lamp Color: Day Light, Warm White, Cool White

Accessories


- Connector
- Switch
- Plug



ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-T5-8 W COVER	8 W	315	18	43	-
FL-T5-14 W COVER	14 W	605	20	43	-
FL-T5-21 W COVER	21 W	905	20	43	-
FL-T5-28 W COVER	28 W	1200	20	43	-



INSTALLATION
Surface Mounted.



FL-T5 Fluorescent Light Without Cover


Linkable Fluorescent Light Without Cover

Fitting Information


Lamp : T5 Fluorescent 8W, 14W, 21W, 28W, 35W
 Socket : G5 (Rotary spring-locked)
 Ballast : Build-in electronic Ballast
 Lamp Color: Day Light, Warm White, Cool White

Accessories


- Connector
- Plug



ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-T5-8W	8 W	313	24	36.5	-
FL-T5-14W	14 W	573	24	36.5	-
FL-T5-21W	21 W	873	24	36.5	-
FL-T5-28W	28 W	1173	24	36.5	-
FL-T5-35W	35 W	1475	24	36.5	-

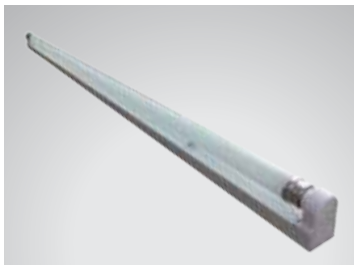

INSTALLATION
Surface Mounted.

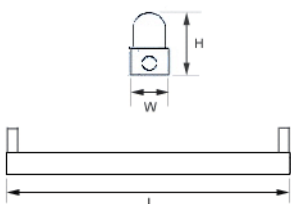


FL-LED-T8 SET

LED T8 SET

Fitting Information

Lamp : T8 LED 8W, 16W
 Socket : Spring-loaded
 Ballast : Build-in electronic Ballast
 Lamp Color: Day Light, Warm White, Cool White



ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-LED-T8-8W	8 W	630	35	55	-
FL-LED-T8-16W	16 W	1230	35	55	-