

FEEL

LIGHTING

CREATIVE LIGHTING
TECHNOLOGY

WWW.FEEL-LIGHTING.COM

LIGHTING FOCUS



PROJECT REFERENCE

WE SERVE YOUR FEELING



BANYAN TREE
— BANGKOK —

FEEL
LIGHTING
CREATIVE
LIGHT



IPPUDO
THAILAND

- AIS SHOP
- AHA SPA (Sukhumvit22)
- Aruna Hotel Chiangrai
- Arch Design & Construction
- Ariyasom Villa Sukhumvit 1
- Banyantree Hotel
- Bareo Office Ratchapuek
- BBQ Plaza
- Bubhakit Building Sathorn
- BIG Camera
- Brother Service Center
- Chia tai group
- Chewa Home Wongwaen-Lamlukka
- Chewa Home



- Suksawat-Prachauthit
- Club House Santiri
- Dusit Thani College Phase II
- Delonix Garden Dive venture Thailand
- Golden Land Bang-na
- Golden Place @SUVARNABHUMI Airport
- H&M Office
- IPPUDO RAMEN
- Jasmine Resort



- JW Marriott
- Kasikorn Bank
- KING POWER @Rangnam
- KING POWER @U-TAPAO
- Kittimas Building MUIC
- KLABI LA PLAYA RESORT
- KOHLER Chiangmai
- Krungsri Bank La Baguette
- Woodland Pattaya



- LAB Pharmacy
- Lake View Condo Lounge @ SUVARNABHUMI Airport
- MAHANAKORN Mininail x Ploenchit
- Mitsubishi Car & Services Pattaya
- Mitsubishi Showroom Nakornnayok Resort
- Orchard Nawamin City
- Paul Shop @The 8ight Thonglor



Mahidol University
International College



Sirikarinchai Building.
• Reseo Home
• SC Asset Office
• Siriraj Hospital (Siammin Building)
• Srithai
• Sirocco Jewelry Shop



• Swan Lake Hotel Chonburi
• Standard Chartered Bank Thonglor



• Paolo Hospital 2 (Elder Care 4Fl.)
• Paolo Samutprakarn
• Private house @Artale Pattanakarn
• Private House @Kanrapapuek
• Private House @Burirum
• Private House @Supanburi
• Private Condo @The Niche Pride Thonglor
• Royal Resident Renovate

• Termnature
• Telewiz
• Texas Chicken
• THRU Thonglor Condo
• Thanasarn Showroom
• @Wine13 Thonglor
• The Garden9
• The Ninth Café
• The Royal Bangkok Sports Club
• Umm..Milk
• Vivo Shop
• Ziess Iconsiam
• ETC.

LIGHTING FOCUS

LED

T U B E

L I G H T

LED TUBE LIGHT

FL-UP & DOWN

Up&Down Pendant LED light




Fitting Information

- Made of high quality cold-rolled steel of thickness 0.6
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.
- Anodized aluminium lover for anti-glare purpose
- 99.85% high purity anodized aluminium reflector with Total Reflectance of 87%
- Spring lock type louver for ease of maintenance
- Provide both up light and down light distribution


INSTALLATION

Able to install to either T-Bar or gypsum ceiling.

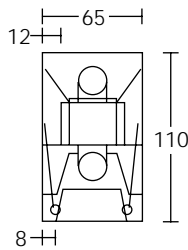


T5LED = 8W/16W
T8LED = 10W/20W

ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SFB 116 UND	1 X 16W T5LED	1220	65	110	-
FL-SFB 216 UND	2 X 16W T5LED	1220	65	110	-
FL-SFB 220 UND	2 X 20W T8LED	1220	65	110	-




FL-Slim-S

Pendant Slim Acrylic LED Light

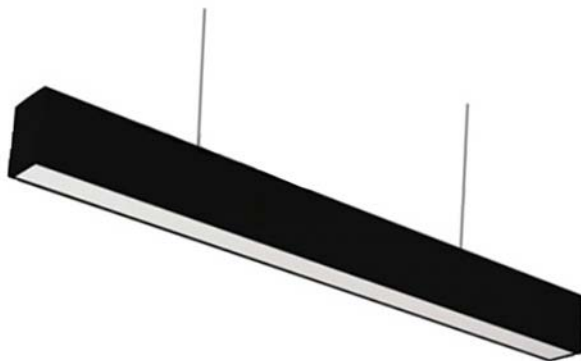


Fitting Information

- Made of high quality cold-rolled steel of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.
- Opal Acrylic Diffuser for smooth light distribution.



ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SFB 116 SLM	1 X 16W T5LED	1190	85	120	-
FL-SFB 216 SLM	2 X 16W T5LED	1190	85	120	-
FL-SFB 120 SLM	1 X 20W T8LED	1190	85	120	-



LED TUBE LIGHT


FL-SLIM-R

Recessed Slim Acrylic LED Light



Fitting Information

- Made of high quality cold-rolled steel of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.
- Opal Acrylic Diffuser for smooth light distribution

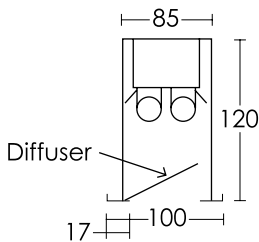

ART NO.	TYPE	DIMENSION (mm.)					Cut out (mm.)
		L1	L2	W1	W2	H	
FL-FFB 116 SLM	1 X 16W T5LED	1190	1170	100	85	120	-
FL-FFB 216 SLM	2 X 16W T5LED	1190	1170	100	85	120	-
FL-FFB 120 SLM	1 X 20W T8LED	1190	1170	100	85	120	-

FL-ARROW-C

Pendant Louver LED Light




Fitting Information

- Made of high quality cold-rolled steel sheet of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.

Reflector & Louver

- 99.85% high-purity pre-anodized aluminium parabolic louver mirror finished for longitudinal.
- Total Reflectance 87% (DIN 3036-2).
- Spring-lock type louver for ease of maintenance.

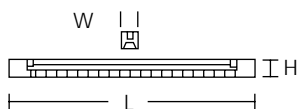

ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SFB 116 ARC	1 X 16W T5LED	1380	90	90	-
FL-SFB 216 ARC	2 X 16W T5LED	1380	110	130	-
FL-SFB 120 ARC	1 X 20W T8LED	1380	110	130	-
FL-SFB 220 ARC	2 X 20W T8LED	1380	130	130	-




FL-ARROW-P

Pendant Acrylic LED Light

Fitting Information

- Made of high quality cold-rolled steel of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.
- Anodized aluminium lover for anti-glare purpose
- 99.85% high purity anodized aluminium reflector with Total Reflectance of 87% (87) for normal usage.
- Opal Acrylic diffuser for smooth light distribution

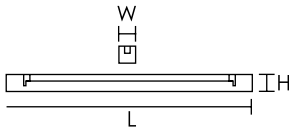

ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SFB 116 ARP	1 X 16W T5LED	1380	90	90	-
FL-SFB 216 ARP	2 X 16W T5LED	1380	110	130	-
FL-SFB 120 ARP	1 X 20W T8LED	1380	110	130	-
FL-SFB 220 ARP	2 X 20W T8LED	1380	130	130	-



FL-LINE-S



Pendant Louver LED Light

Fitting Information

- Made of high quality cold-rolled steel of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.

Reflector & Louver

- 99.85% high purity anodized aluminium reflector with Total Reflectance of 87% (87) for normal usage.
- Spring-lock type louver for ease of maintenance.

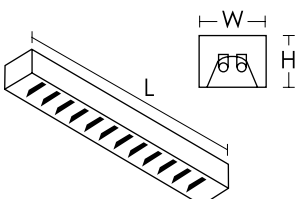

ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SFB 116 LINE	1 X 16W T5LED	1200	90	90	-
FL-SFB 216 LINE	2 X 16W T5LED	1200	100	130	-
FL-SFB 220 LINE	2 X 20W T8LED	1245	150	130	-

LED TUBE LIGHT

FL-LINE-R

Recessed Louver LED Light





Fitting Information

- Made of high quality cold-rolled steel of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.

Reflector & Louver

- 99.85% high purity anodized aluminium reflector with Total Reflectance of 87% (87) for normal usage.
- Spring-lock type louver for ease of maintenance.

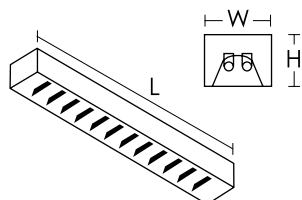

ART NO.	TYPE	DIMENSION (mm.)					Cut out (mm.)
		L1	L2	W1	W2	H	
FL-FFB 116 LNE	1 X 16W T5LED	1195	1170	120	90	130	-
FL-FFB 216 LNE	2 X 16W T5LED	1195	1170	130	100	130	-
FL-FFB 220 LNE	2 X 20W T8LED	1270	1245	180	150	130	-

FL-FRAME

Recessed Downlight & LED Light




Fitting Information

- Made of high quality cold-rolled steel sheet of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.

Diffuser

- Dual QR111 downlight on both end
(Optional : other downlight are available upon request)
- Opal Acrylic Diffuser for smooth light distribution

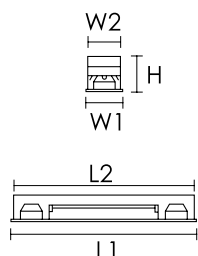

ART NO.	TYPE	DIMENSION (mm.)					Cut out (mm.)
		L1	L2	W1	W2	H	
FL-FFB 116 FRM	1 X 16W T5LED	1626	1602	206	180	140	-
FL-FFB 216 FRM	2 X 16W T5LED	1626	1602	206	180	140	-
FL-FFB 220 FRM	2 X 20W T8LED	1646	1622	206	180	140	-




FL-WING

Surface Mounted LED Light

Fitting Information

- Made of high quality cold-rolled steel sheet of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.



ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SBO 116 WNG	1 X 16W T5LED	1200	295	115	-
FL-SBO 216 WNG	2 X 16W T5LED	1200	295	115	-
FL-SBO 120 WNG	1 X 20W T8LED	1240	295	115	-
FL-SBO 220 WNG	2 X 20W T8LED	1240	295	115	-




FL-CURVE

Recessed T-Bar and Gypsum LED Light

Fitting Information

- Made of high quality cold-rolled steel sheet of thickness 0.6 (T6)
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method

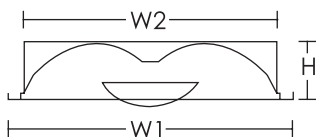

ART NO.	TYPE	DIMENSION (mm.)					Cut out (mm.)
		L1	L2	W1	W2	H	
FL-T&F0 208 CR1V	2 X 08W T5LED	595	565	595	565	115	-
FL-T&F0 216 CR1V	2 X 16W T5LED	1195	1170	595	565	115	-
FL-T&F0 210 CR1V	2 X 10W T8LED	595	615	595	425	115	-
FL-T&F0 220 CR1V	2 X 20W T8LED	1195	1222	595	425	115	-

LED TUBE LIGHT



FL-TF-T8

Recessed T-Bar and Gypsum T8 LED Light

Fitting Information

Steel sheet thickness 0.6, 0.8 mm.


Lamp : LED T8 10W, 20W

Socket : G13 (Rotary spring-locked) Five-stage zinc-phosphate pretreatment for rust resistance.

Finished with white polyester powder by two-stage electrostatic method and baked enamel.

Reflector & Louver

- 99.85% high-purity pre-anodized aluminium parabolic louver mirror finished for longitudinal.
- Profile aluminium for transversal to anti-glare with 5 standard cross blades for the 10w and 12 cross blades for the 20w.
- Head-opened louver.



ART NO.	TYPE	DIMENSION (mm.)					Cut out (mm.)
		L1	L2	W1	W2	H	
FL-TF 110 CR	1 X 10W T8LED	595	620	200	170	90	165 X 575
FL-TF 110 CBR	1 X 10W T8LED	595	620	295	265	90	275 X 575
FL-TF 210 CR	2 X 10W T8LED	595	620	295	265	90	275 X 575
FL-TF 210 CBR	2 X 10W T8LED	595	620	595	565	90	575 X 575
FL-TF 310 CR	3 X 10W T8LED	595	620	595	565	90	575 X 575
FL-TF 410 CR	4 X 10W T8LED	595	620	595	565	90	575 X 575
FL-TF 120 CR	1 X 20W T8LED	1195	1222	200	170	90	165 X 1175
FL-TF 120 CBR	1 X 20W T8LED	1195	1222	295	265	90	275 X 1175
FL-TF 220 CR	2 X 20W T8LED	1195	1222	295	265	90	575 X 1175
FL-TF 220 CBR	2 X 20W T8LED	1195	1222	595	565	90	575 X 1175
FL-TF 320 CR	3 X 20W T8LED	1195	1222	595	565	90	575 X 1175
FL-TF 420 CR	4 X 20W T8LED	1195	1222	595	565	90	575 X 1175



FL-SB-T8

Surface Mounted T8 LED Light

Fitting Information

Steel sheet thickness 0.6, 0.8 mm.

Lamp : LED T8 10W, 20W


Socket : G13 (Rotary spring-locked)

Five-stage zinc-phosphate pretreatment for rust resistance.

Finished with white polyester powder by two-stage electrostatic method and baked enamel.

Reflector & Louver

- 99.85% high-purity pre-anodized aluminium parabolic louver mirror finished for longitudinal. Total Reflectance 87%
- Profile aluminium for transversal to anti-glare with 5 standard cross blades for the 10w and 12 cross blades for the 20w.



ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SB 110 CR	1 X 10W T8LED	615	200	95	-
FL-SB 110 CBR	1 X 10W T8LED	615	295	95	-
FL-SB 210 CR	2 X 10W T8LED	615	295	95	-
FL-SB 210 CBR	2 X 10W T8LED	615	595	95	-
FL-SB 310 CR	3 X 10W T8LED	615	595	95	-
FL-SB 410 CR	4 X 10W T8LED	615	595	95	-
FL-SB 120 CR	1 X 20W T8LED	1222	200	95	-
FL-SB 120 CBR	1 X 20W T8LED	1222	295	95	-
FL-SB 220 CR	2 X 20W T8LED	1222	295	95	-
FL-SB 220 CBR	2 X 20W T8LED	1222	595	95	-
FL-SB 320 CR	3 X 20W T8LED	1222	595	95	-
FL-SB 420 CR	4 X 20W T8LED	1222	595	95	-





FL-TF-T8P

Recessed T-Bar and Gypsum T8 LED Light

Fitting Information


Steel sheet thickness 0.6, 0.8 mm.

Lamp : LED 10W, 20W

Socket : G13 (Rotary spring-locked) / Spring load type lampholder
Five-stage zinc-phosphate pretreatment for rust resistance.
Finished with white polyester powder by two-stage electrostatic method and baked enamel.

Diffuser

- High quality acrylic diffuser : Prismatic / Opal / Stipple / Clear.



ART NO.	TYPE	DIMENSION (mm.)					Cut out (mm.)
		L1	L2	W1	W2	H	
FL-TFB 110 P	1 X 10W T8LED	595	636	200	154	115	-
FL-TFB 110 PB	1 X 10W T8LED	595	636	295	249	115	-
FL-TFB 210 P	2 X 10W T8LED	595	636	295	249	115	-
FL-TFB 210 PB	2 X 10W T8LED	595	636	595	549	115	-
FL-TFB 310 P	3 X 10W T8LED	595	636	595	549	115	-
FL-TFB 410 P	4 X 10W T8LED	595	636	595	549	115	-
FL-TFB 120 P	1 X 20W T8LED	1195	1243	200	154	115	-
FL-TFB 120 PB	1 X 20W T8LED	1195	1243	295	249	115	-
FL-TFB 220 P	2 X 20W T8LED	1195	1243	295	249	115	-
FL-TFB 220 PB	2 X 20W T8LED	1195	1243	595	549	115	-
FL-TFB 320 P	3 X 20W T8LED	1195	1243	595	549	115	-
FL-TFB 420 P	4 X 20W T8LED	1195	1243	595	549	115	-



FL-SFB-T8

Surface Mounted LED T8 Prismatic Luminaire

Fitting Information


Steel sheet thickness 0.6, 0.8 mm.

Lamp : LED 10W, 20W

Socket : G13 (Rotary spring-locked) / Spring load type lampholder
Five-stage zinc-phosphate pretreatment for rust resistance.
Finished with white polyester powder by two-stage electrostatic method and baked enamel.

Diffuser

- High quality acrylic diffuser : Prismatic / Opal / Stipple / Clear.



ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SFB 110 P	1 X 10W T8LED	615	200	82	-
FL-SFB 110 PB	1 X 10W T8LED	615	295	82	-
FL-SFB 210 P	2 X 10W T8LED	615	295	82	-
FL-SFB 210 PB	2 X 10W T8LED	615	595	82	-
FL-SFB 310 P	3 X 10W T8LED	615	595	82	-
FL-SFB 410 P	4 X 10W T8LED	615	595	82	-
FL-SFB 120 P	1 X 20W T8LED	1222	200	82	-
FL-SFB 120 PB	1 X 20W T8LED	1222	295	82	-
FL-SFB 220 P	2 X 20W T8LED	1222	295	82	-
FL-SFB 220 PB	2 X 20W T8LED	1222	595	82	-
FL-SFB 320 P	3 X 20W T8LED	1222	595	82	-
FL-SFB 420 P	4 X 20W T8LED	1222	595	82	-



LED TUBE LIGHT

FL-TF-T5

Recessed T-Bar and Gypsum T5 LED Light



Fitting Information

Steel sheet thickness 0.6, 0.8 mm.


Lamp : LED T5 8W, 16W

Socket : G5 (Rotary spring-locked)

Five-stage zinc-phosphate pretreatment for rust resistance.
Finished with white polyester powder by two-stage electrostatic method and baked enamel.

Reflector & Louver


- 99.85% high-purity pre-anodized aluminium parabolic louver mirror finished for longitudinal. Total Reflectance 87%
- Profile aluminium for transversal to anti-glare with 5 standard cross blades for the 8w and 12 cross blades for the 16w.



ART NO.	TYPE	DIMENSION (mm.)					Cut out (mm.)
		L1	L2	W1	W2	H	
FL-TF 108 CR	1 X 8W T5LED	570	595	200	170	65	165 X 575
FL-TF 108 CBR	1 X 8W T5LED	570	595	295	265	65	275 X 575
FL-TF 208 CR	2 X 8W T5LED	570	595	295	265	65	275 X 575
FL-TF 208 CBR	2 X 8W T5LED	570	595	595	565	65	575 X 575
FL-TF 308 CR	3 X 8W T5LED	570	595	595	565	65	575 X 575
FL-TF 408 CR	4 X 8W T5LED	570	595	595	565	65	575 X 575
FL-TF 116 CR	1 X 16W T5LED	1170	1195	200	170	65	165 X 1175
FL-TF 116 CBR	1 X 16W T5LED	1170	1195	295	265	65	275 X 1175
FL-TF 216 CR	2 X 16W T5LED	1170	1195	295	265	65	575 X 1175
FL-TF 216 CBR	2 X 16W T5LED	1170	1195	595	565	65	575 X 1175
FL-TF 316 CR	3 X 16W T5LED	1170	1195	595	565	65	575 X 1175
FL-TF 416 CR	4 X 16W T5LED	1170	1195	595	565	65	575 X 1175

FL-SB-T5

Surface Mounted T5 LED Light

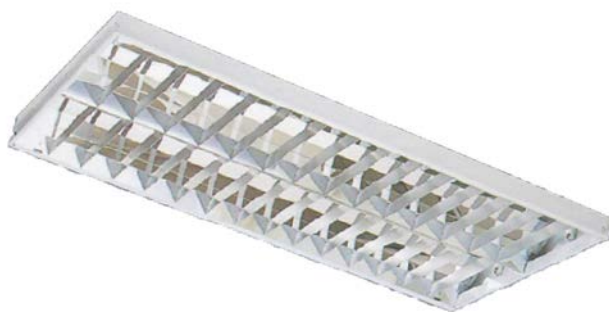

Fitting Information

Steel sheet thickness 0.6, 0.8 mm.


Lamp : LED Fluorescent T5 8W ,16W

Socket : G5 (Rotary spring-locked)

Five-stage zinc-phosphate pretreatment for rust resistance.
Finished with white polyester powder by two-stage electrostatic method and baked enamel.

Reflector & Louver

- 99.85% high-purity pre-anodized aluminium parabolic louver mirror finished for longitudinal. Total Reflectance 87%
- Profile aluminium for transversal to anti-glare with 5 standard cross blades for the 8w and 12 cross blades for the 16w.



ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SB 108 CR	1 X 8W T5LED	595	200	65	-
FL-SB 108 CBR	1 X 8W T5LED	595	295	65	-
FL-SB 208 CR	2 X 8W T5LED	595	295	65	-
FL-SB 208 CBR	2 X 8W T5LED	595	595	65	-
FL-SB 308 CR	3 X 8W T5LED	595	595	65	-
FL-SB 408 CR	4 X 8W T5LED	595	595	65	-
FL-SB 116 CR	1 X 16W T5LED	1200	200	65	-
FL-SB 116 CBR	1 X 16W T5LED	1200	295	65	-
FL-SB 216 CR	2 X 16W T5LED	1200	295	65	-
FL-SB 216 CBR	2 X 16W T5LED	1200	595	65	-
FL-SB 316 CR	3 X 16W T5LED	1200	595	65	-
FL-SB 416 CR	4 X 16W T5LED	1200	595	65	-

FL-TFP-T5

Recessed T-Bar and Gypsum T5 LED Prismatic Luminaire



Fitting Information


Steel sheet thickness 0.6, 0.8 mm.

Lamp : LED Fluorescent T5 8W ,16W

Socket : G5 (Rotary spring-locked) / Spring load type lampholder
Five-stage zinc-phosphate pretreatment for rust resistance.
Finished with white polyester powder by two- stage electrostatic method and baked enamel.

Diffuser

- High quality acrylic diffuser : Prismatic / Opal / Stipple / Clear.



ART NO.	TYPE	DIMENSION (mm.)					Cut out (mm.)
		L1	L2	W1	W2	H	
FL-TF 108 P	1 X 8W T5LED	570	595	200	170	65	165 X 575
FL-TF 108 PB	1 X 8W T5LED	570	595	295	265	65	275 X 575
FL-TF 208 P	2 X 8W T5LED	570	595	295	265	65	275 X 575
FL-TF 208 PB	2 X 8W T5LED	570	595	595	565	65	575 X 575
FL-TF 308 P	3 X 8W T5LED	570	595	595	565	65	575 X 575
FL-TF 408 P	4 X 8W T5LED	570	595	595	565	65	575 X 575
FL-TF 116 P	1 X 16W T5LED	1170	1195	200	170	65	165 X 1175
FL-TF 116 PB	1 X 16W T5LED	1170	1195	295	265	65	275 X 1175
FL-TF 216 P	2 X 16W T5LED	1170	1195	295	265	65	575 X 1175
FL-TF 216 PB	2 X 16W T5LED	1170	1195	595	565	65	575 X 1175
FL-TF 416 P	4 X 16W T5LED	1170	1195	595	565	65	575 X 1175

FL-SBP-T5

Surface Mounted T5 LED Prismatic Luminaire



Fitting Information


Steel sheet thickness 0.6, 0.8 mm.

Lamp : LED Fluorescent T5 8W, 16W

Socket : G5 (Rotary spring-locked) / Spring load type lampholder
Five-stage zinc-phosphate pretreatment for rust resistance.
Finished with white polyester powder by two- stage electrostatic method and baked enamel.

Diffuser

- High quality acrylic diffuser : Prismatic / Opal / Stipple / Clear.



ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-SB 108 P	1 X 8W T5LED	595	200	81	-
FL-SB 108 PB	1 X 8W T5LED	595	295	81	-
FL-SB 208 P	2 X 8W T5LED	595	295	81	-
FL-SB 208 PB	2 X 8W T5LED	595	595	81	-
FL-SB 308 P	3 X 8W T5LED	595	595	81	-
FL-SB 408 P	4 X 8W T5LED	595	595	81	-
FL-SB 116 P	1 X 16W T5LED	1200	200	81	-
FL-SB 116 PB	1 X 16W T5LED	1200	295	81	-
FL-SB 216 P	2 X 16W T5LED	1200	295	81	-
FL-SB 216 PB	2 X 16W T5LED	1200	595	81	-
FL-SB 316 P	3 X 16W T5LED	1200	595	81	-
FL-SB 416 P	4 X 16W T5LED	1200	595	81	-

LED TUBE LIGHT

FL-PLF5

Plastic Louver LED Light

Fitting Information

Steel sheet thickness 0.6 mm.


Lamp : LED Fluorescent T8 10W, 20W

Socket : G 13 (Rotary spring-locked)

Five-stage zinc-phosphate pretreatment for rust resistance. Finished with white polyester powder by two-stage electrostatic method and baked enamel.

Reflector & Louver

- 99.85% purity anodized aluminium reflector to provide total reflectance 87% mirror finished (AL)
- ABS Plastic Injection Louver.
- Louver Color : White / Silver.

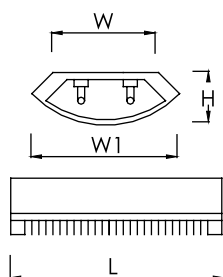

ART NO.	TYPE	DIMENSION (mm.)				Cut out (mm.)
		L	W	W1	H	
FL-PLF5 110	1 X 10W T8LED	655	185	210	65	-
FL-PLF5 210	2 X 10W T8LED	655	185	210	65	-
FL-PLF5 120	1 X 20W T8LED	1250	185	210	65	-
FL-PLF5 220	2 X 20W T8LED	1250	185	210	65	-

FL-PE

Weather Pack Luminaire

Fitting Information


Lamp : LED Fluorescent T8 10W, 20W

Socket : G 13 (Rotary spring-locked)

IP Rating : IP65

Specification

- Gray shockproof ABS.
- Polycarbonate anti-UV diffuser cover.

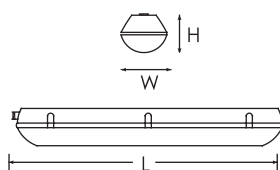

ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-PE 110 WR	1 X 10W T8LED	675	98	100	-
FL-PE 210 WR	2 X 10W T8LED	675	156	100	-
FL-PE 120 WR	1 X 20W T8LED	1280	98	100	-
FL-PE 220 WR	2 X 20W T8LED	1280	156	100	-



FL-BTLED

LED T8 SET


Fitting Information

Lamp : LED Fluorescent T8 10W, 20W

Socket : Spring-loaded

Ballast : Build-in electronic Ballast

Lamp Color: Day Light, Warm White, Cool White

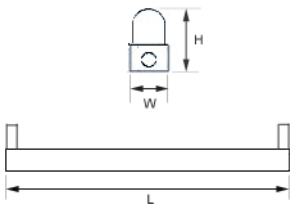

ART NO.	TYPE	DIMENSION (mm.)			Cut out (mm.)
		L	W	H	
FL-LED T8-10W	10W	630	35	55	-
FL-LED-T8-20W	20W	1230	35	55	-

SQUARE

D O W N

L I G H T

SQUARE DOWNLIGHT




FL-DLEDS46

Recessed Slim LED Downlight

Fitting Information

Control Gear : Built-in Driver
Watt : 6 Watt
Driver : 6 Watt




FL-DLEDS49

Recessed Slim LED Downlight

Fitting Information

Control Gear : Built-in Driver
Watt : 9 Watt
Driver : 9 Watt



FL-DLEDS412

Recessed Slim LED Downlight

Fitting Information

Control Gear : Built-in Driver
Watt : 12 Watt
Driver : 12 Watt



FL-DLEDS418

Recessed Slim LED Downlight

Fitting Information

Control Gear : Built-in Driver
Watt : 18 Watt
Driver : 18 Watt



SQUARE DOWNLIGHT




FL-LEDPANEL-SQ20

LED Panel

Fitting Information

Control Gear : Built-in Driver
Watt : 20 Watt
Driver : 20 Watt

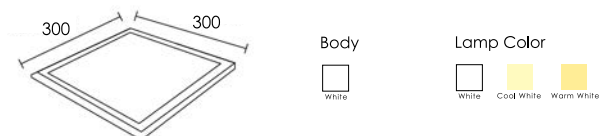


FL-LEDPANEL-SL24

LED Panel

Fitting Information

Control Gear : Built-in Driver
Watt : 24 Watt
Driver : 24 Watt

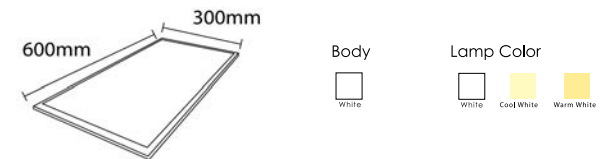


FL-LEDPANEL-SQ48

LED Panel

Fitting Information

Control Gear : Built-in Driver
Watt : 48 Watt
Driver : 48 Watt

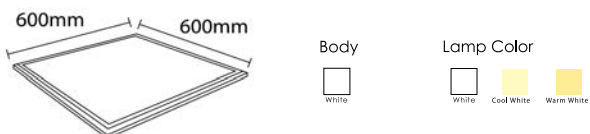


FL-LEDPANEL-SL48

LED Panel

Fitting Information

Control Gear : Built-in Driver
Watt : 48 Watt
Driver : 48 Watt

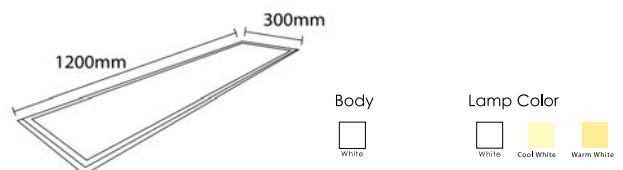




FL-LEDPANEL-SL72

LED Panel

Fitting Information

Control Gear : Built-in Driver
 Watt : 72 Watt
 Driver : 72 Watt

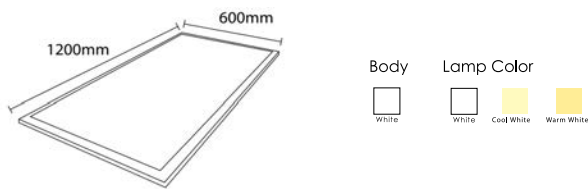

FL-DLED43

Recessed Adjustable LED Downlight

Fitting Information

Control Gear : Built-in Driver
 Watt : 3 Watt
 Driver : 3 x 1 Watt




FL-DLED47

Recessed Adjustable LED Downlight

Fitting Information

Control Gear : Built-in Driver
 Watt : 6 Watt
 Driver : 6 x 1 Watt

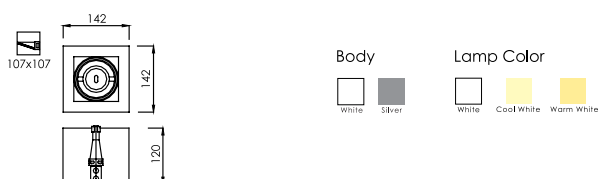


FL-DLED412

Recessed Adjustable LED Downlight

Fitting Information

Control Gear : Built-in Driver
 Watt : 12 Watt
 Driver : 12 x 1Watt

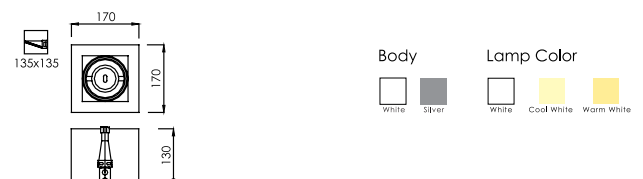

SQUARE DOWNLIGHT



FL-2412G

Recessed Glass Cover Downlight

LAMP


LED STICK X 1
LED BULB X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27

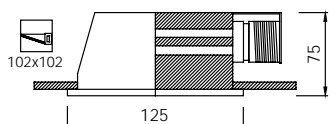

Trim color



Reflector type



Smooth Silver



FL-2416G

Recessed Glass Cover Downlight

LAMP


LED STICK X 2
LED BULB X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27

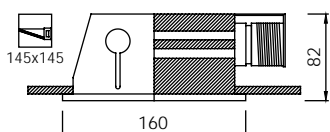

Trim color



Reflector type



Smooth Silver



FL-2420G

Recessed Glass Cover Downlight

LAMP


LED STICK X 2
LED BULB X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27

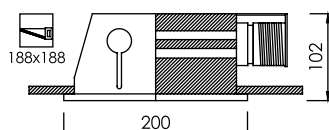

Trim color



Reflector type



Smooth Silver



FL-2454G

Recessed Glass Cover Downlight

LAMP


LED STICK X 2
LED BULB X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27

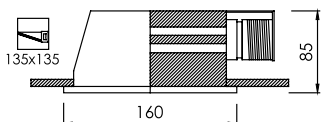

Trim color



Reflector type



Smooth Silver



FL-2414G

Recessed Glass Cover Downlight

LAMP


LED STICK X 1,2
LED BULB X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27

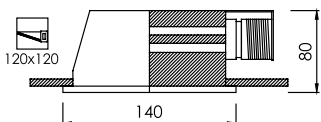

Trim color



Reflector type



Smooth Silver



FL-2417G

Recessed Glass Cover Downlight

LAMP


LED STICK X 1,2
LED BULB X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27

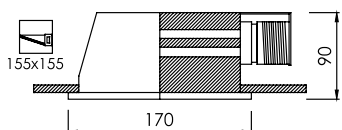

Trim color



Reflector type



Smooth Silver

SQUARE DOWNLIGHT



FL-2418G

Recessed Glass Cover Downlight

LAMP


LED STICK X 1,2
LED BULB X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27

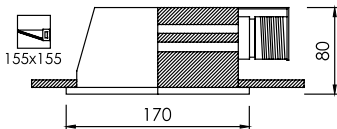

Trim color



Reflector type



Smooth Silver



FL-2407G

Recessed Glass Cover Downlight

LAMP


LED STICK X 1,2
LED BULB X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27

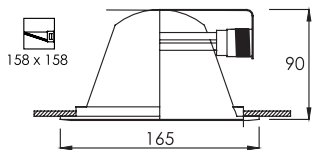

Trim color



Reflector type



Smooth Silver



FL-2412

Recessed Downlight

LAMP


LED STICK X 1
LED BULB X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27

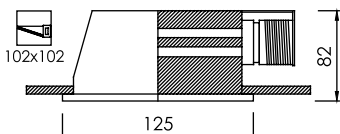

Trim color



Reflector type



Smooth Silver



FL-2414

Recessed Downlight

LAMP


LED STICK X 1
LED BULB X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27

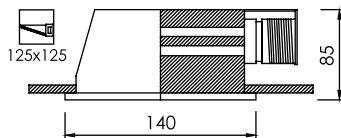

Trim color



Reflector type



Smooth Silver



FL-2417

Recessed Downlight

LAMP


LED STICK X 2
LED BULB X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27

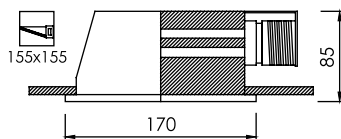

Trim color



Reflector type



Smooth Silver



FL-2419

Recessed Downlight

LAMP


LED STICK X 2
LED BULB X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27

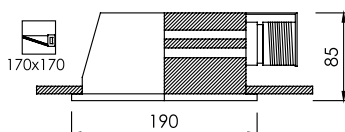

Trim color



Reflector type



Smooth Silver

SQUARE DOWNLIGHT



FL-2434

Recessed Downlight

LAMP


LED STICK X 4
LED BULB X 2

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27

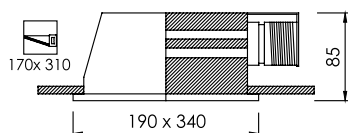

Trim color



Reflector type



Smooth Silver



FL-1412-1

Recessed Downlight

LAMP


LED STICK X 1
LED BULB X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27




Trim color



Reflector type



Smooth Silver

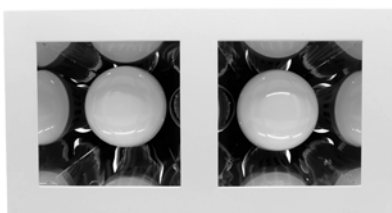

FL-1412-2

Recessed Downlight

LAMP


LED STICK X 2
LED BULB X 2

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27

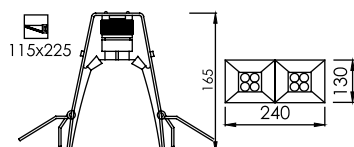


Trim color



Reflector type



Smooth Silver

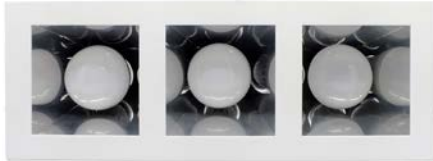

FL-1412-3

Recessed Downlight

LAMP


LED STICK X 3
LED BULB X 3

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27

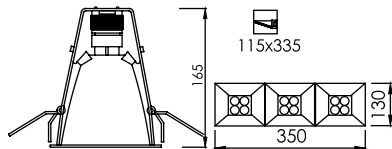

Trim color



Reflector type



FL-1417-1

Recessed Downlight

LAMP


LED STICK X 1
LED BULB X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27



Trim color



Reflector type



FL-1413-1

Recessed Downlight

LAMP


LED STICK X 1
LED BULB X 1
LED PAR20 X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W
6W

SOCKET

E27
E27
E27

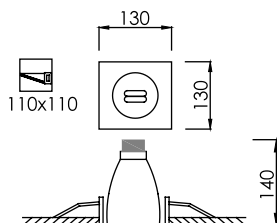


Trim color



Reflector type



SQUARE DOWNLIGHT

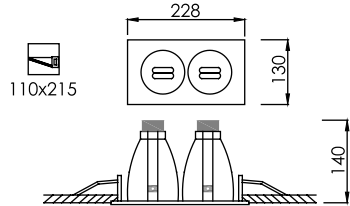

FL-1413-2


Recessed Downlight

LAMP	WATT	SOCKET
LED STICK X 2	5.5W/7.5W/9.5W/11W/13W	E27
LED BULB X 2	7W/9W/10W/12W	E27
LED PAR20 X 2	6W	E27

Trim color



Reflector type

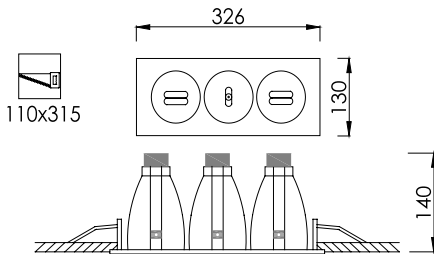

FL-1413-3


Recessed Downlight

LAMP	WATT	SOCKET
LED STICK X 3	5.5W/7.5W/9.5W/11W/13W	E27
LED BULB X 3	7W/9W/10W/12W	E27
LED PAR20 X 3	6W	E27

Trim color



Reflector type

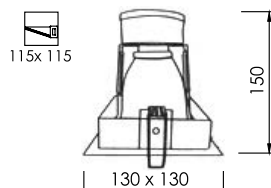

FL-1414-1

Recessed Downlight

LAMP	WATT	SOCKET
LED STICK X 1	5.5W/7.5W/9.5W/11W/13W	E27
LED BULB X 1	7W/9W/10W/12W	E27

Trim color



Reflector type





FL-1414-2

Recessed Downlight

LAMP


LED STICK X 2
LED BULB X 2

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET


E27
E27

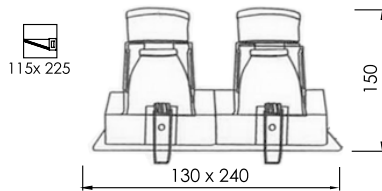

Trim color



Reflector type

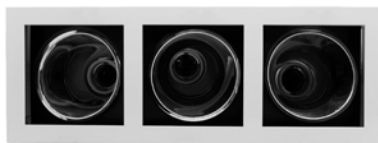

FL-1414-3

Recessed Downlight

LAMP


LED STICK X 3
LED BULB X 3

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27

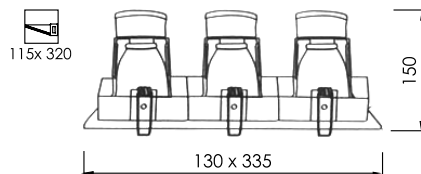

Trim color



Reflector type



FL-1415-1

Recessed Downlight

LAMP


LED STICK X 1
LED BULB X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27



Trim color



Reflector type



SQUARE DOWNLIGHT



FL-1415-2

Recessed Downlight

LAMP


LED STICK X 2
LED BULB X 2

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W

SOCKET

E27
E27



Trim color



Reflector type



FL-B413-1

Recessed Adjustable Light Box

LAMP


LED STICK X 1
LED BULB X 1
LED PAR20 X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W
6W

SOCKET

E27
E27
E27

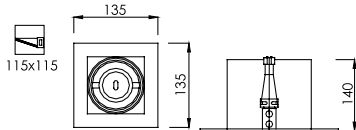

Trim color



Reflector type



FL-B413-2

Recessed Adjustable Light Box

LAMP


LED STICK X 2
LED BULB X 2
LED PAR20 X 2

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W
6W

SOCKET

E27
E27
E27

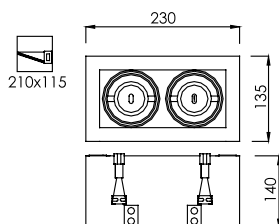


Trim color



Reflector type



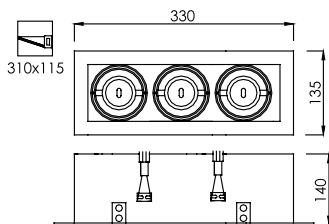

FL-B413-3

Recessed Adjustable Light Box

LAMP

LED STICK X 3
LED BULB X 3
LED PAR20 X 3

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W
6W


SOCKET

E27
E27
E27

Trim color



Reflector type

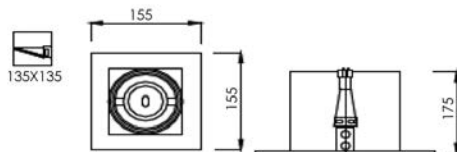

FL-B450-1

Recessed Adjustable Light Box

LAMP

LED STICK X 1
LED BULB X 1
LED PAR20 X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W
6W


SOCKET

E27
E27
E27

Trim color



Reflector type

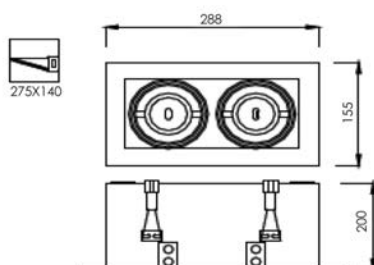

FL-B450-2

Recessed Adjustable Light Box

LAMP

LED STICK X 2
LED BULB X 2
LED PAR20 X 2

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W
6W

SOCKET

E27
E27
E27

Trim color



Reflector type



SQUARE DOWNLIGHT



FL-B420-1

Recessed Adjustable Light Box

LAMP


LED STICK X 1
LED BULB X 1
LED PAR30 X 1

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W
9W/20W/32W/40W

SOCKET

E27
E27
E27

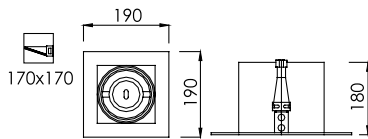

Trim color



Reflector type



Smooth Silver



FL-B420-2

Recessed Adjustable Light Box

LAMP


LED STICK X 2
LED BULB X 2
LED PAR30 X 2

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W
9W/20W/32W/40W

SOCKET

E27
E27
E27

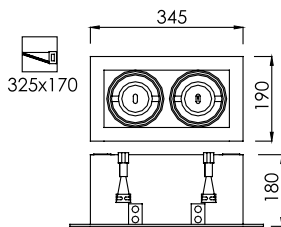

Trim color



Reflector type



Smooth Silver



FL-B420-3

Recessed Adjustable Light Box

LAMP


LED STICK X 3
LED BULB X 3
LED PAR30 X 3

WATT

5.5W/7.5W/9.5W/11W/13W
7W/9W/10W/12W
9W/20W/32W/40W

SOCKET

E27
E27
E27

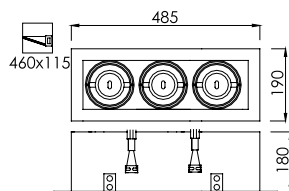

Trim color



Reflector type



Smooth Silver



FL-142

Surface Downlight

LAMP	WATT	SOCKET
LED STICK X 1	5.5W/7.5W/9.5W/11W/13W	E27
LED BULB X 1	7W/9W/10W/12W	E27
LED PAR20 X 1	6W	E27

Body



Reflector type



Smooth Silver



FL-144

Surface Downlight

LAMP	WATT	SOCKET
LED STICK X 1	5.5W/7.5W/9.5W/11W/13W	E27
LED BULB X 1	7W/9W/10W/12W	E27
LED PAR20 X 1	6W	E27

Body



Reflector type



Smooth Silver



FL-145

Surface Downlight

LAMP	WATT	SOCKET
LED STICK X 1	5.5W/7.5W/9.5W/11W/13W	E27
LED BULB X 1	7W/9W/10W/12W	E27
LED PAR20 X 1	6W	E27

Body




Reflector type



Smooth Silver



SQUARE DOWNLIGHT

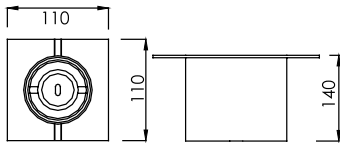

FL-140-1

Surface Adjustable Downlight



LAMP	WATT	SOCKET
LED STICK X 1	5.5W/7.5W/9.5W/11W/13W	E27
LED BULB X 1	7W/9W/10W/12W	E27
LED PAR20 X 1	6W	E27



FL-140-2

Surface Adjustable Downlight

LAMP	WATT	SOCKET
LED STICK X 2	5.5W/7.5W/9.5W/11W/13W	E27
LED BULB X 2	7W/9W/10W/12W	E27
LED PAR20 X 2	6W	E27

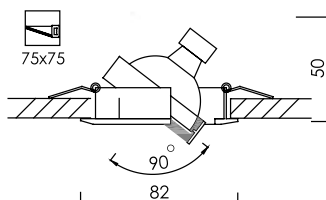

FL-348

Recessed Adjustable Mini Downlight


LAMP	WATT	SOCKET
LED MR16 X 1	5W/5.5W/7W DIM	GX5.3





FL-3410

Recessed Adjustable Mini Downlight

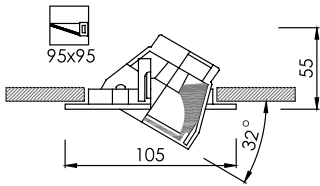


Body



FL-3430

Recessed Adjustable Mini Downlight

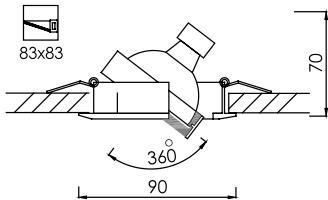


Body



FL-3469

Recessed Adjustable Mini Downlight

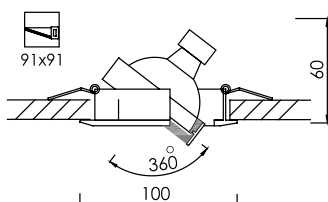

Body




SQUARE DOWNLIGHT



FL-3475

Recessed Mini Downlight


LAMP	WATT	SOCKET
LED MR16 X 1	5W/5.5W/7W DIM	GX5.3

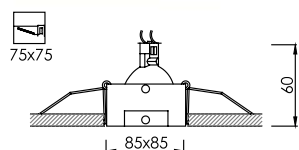

FL-3476

Recessed Mini Downlight


LAMP	WATT	SOCKET
LED MR16 X 1	5W/5.5W/7W DIM	GX5.3

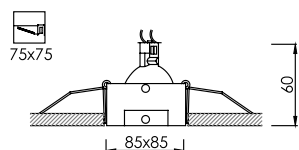

FL-3531

Recessed Adjustable Mini Downlight

LAMP	WATT	SOCKET
LED MR16 X 1	5W/5.5W/7W DIM	GX5.3

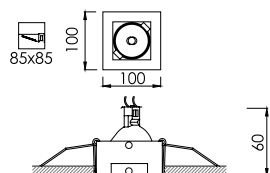




FL-3532

Recessed Adjustable Mini Downlight

LAMP	WATT	SOCKET
LED MR16 X 2	5W/5.5W/7W DIM	GX5.3

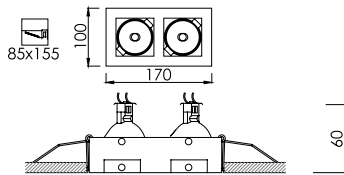


Body



FL-3533

Recessed Adjustable Mini Downlight

LAMP	WATT	SOCKET
LED MR16 X 3	5W/5.5W/7W DIM	GX5.3

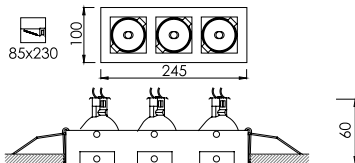


Body



FL-3534

Recessed Adjustable Mini Downlight

LAMP	WATT	SOCKET
LED MR16 X 4	5W/5.5W/7W DIM	GX5.3

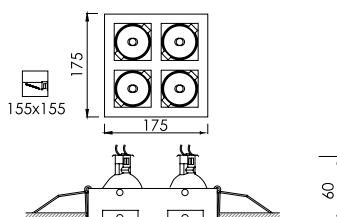

Body




SQUARE DOWNLIGHT



FL-3471

Recessed Adjustable Mini Downlight


LAMP	WATT	SOCKET
LED MR16 X 1	5W/5.5W/7W DIM	GX5.3

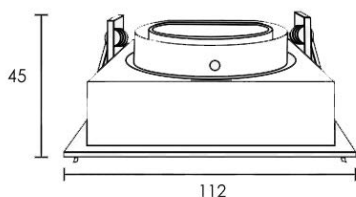

FL-3472

Recessed Adjustable Mini Downlight


LAMP	WATT	SOCKET
LED MR16 X 2	5W/5.5W/7W DIM	GX5.3

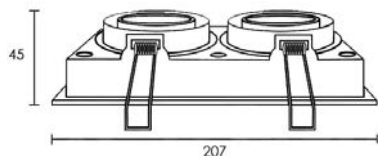

FL-341-1

Recessed Mini Downlight

LAMP	WATT	SOCKET
LED MR16 X 1	5W/5.5W/7W DIM	GX5.3

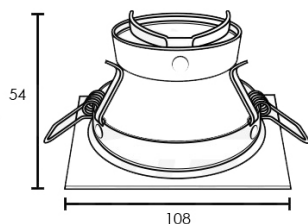




FL-341-2

Recessed Mini Downlight

LAMP	WATT	SOCKET
LED MR16 X 2	5W/5.5W/7W DIM	GX5.3

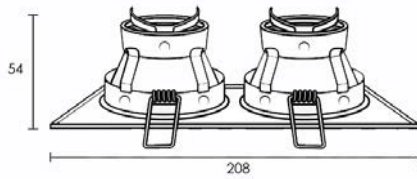


Body



FL-321-1

Recessed Downlight

LAMP	WATT	SOCKET
LED MR16 X 1	5W/5.5W/7W DIM	GX5.3

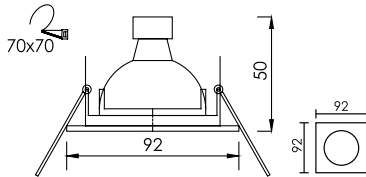


Trim Color



FL-321-2

Recessed Downlight

LAMP	WATT	SOCKET
LED MR16 X 2	5W/5.5W/7W DIM	GX5.3

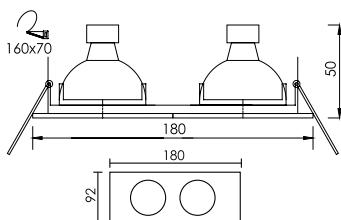

Trim Color



SQUARE DOWNLIGHT



FL-322-1

Recessed Adjustable Downlight

LAMP


LED MR16 X 1

WATT

5W/5.5W/7W DIM

SOCKET

GX5.3

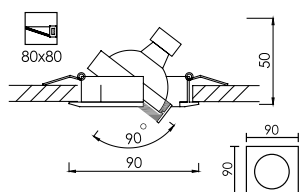

Trim Color



FL-322-2

Recessed Adjustable Downlight



LAMP


LED MR16 X 2

WATT

5W/5.5W/7W DIM

SOCKET

GX5.3

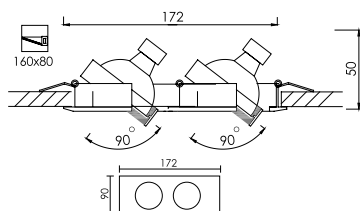

Trim Color



FL-322-3

Recessed Adjustable Downlight



LAMP


LED MR16 X 3

WATT

5W/5.5W/7W DIM


SOCKET

GX5.3

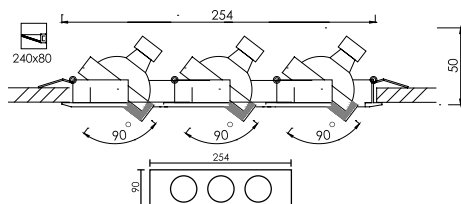

Trim Color



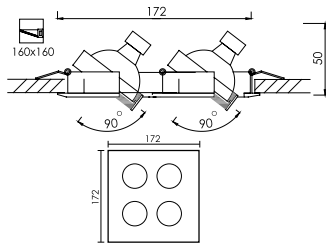


FL-322-4

Recessed Adjustable Downlight

LAMP	WATT	SOCKET
LED MR16 X 4	5W/5.5W/7W DIM	GX5.3

Trim Color




FL-3411

Recessed Adjustable Lightbox

LAMP	WATT	SOCKET
LED MR16 X 1	5W/5.5W/7W DIM	GX5.3

Body



FL-3411A-1


Recessed Adjustable Downlight

LAMP	WATT	SOCKET
LED MR16 X 1	5W/5.5W/7W DIM	GX5.3

Body



SQUARE DOWNLIGHT

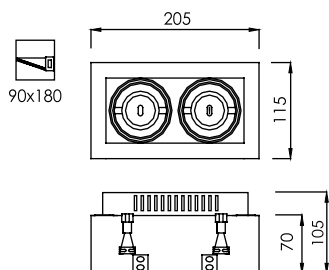


FL-3411A-2

Recessed Adjustable Lightbox

LAMP	WATT	SOCKET
LED MR16 X 2	5W/5.5W/7W DIM	GX5.3

Trim color

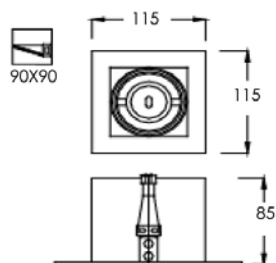


FL-3414-1

Recessed Adjustable Lightbox

LAMP	WATT	SOCKET
LED MR16 X 1	5W/5.5W/7W DIM	GX5.3

Trim color

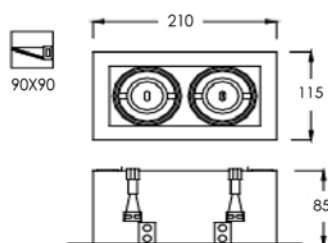


FL-3414-2

Recessed Adjustable Lightbox

LAMP	WATT	SOCKET
LED MR16 X 2	5W/5.5W/7W DIM	GX5.3

Trim color



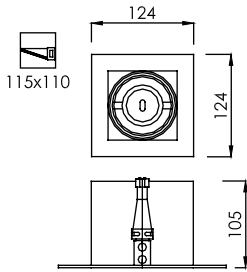

FL-3412-1

Recessed Adjustable Lightbox

LAMP

LED MR16 X 1


WATT

5W/5.5W/7W DIM

SOCKET

GX5.3

Trim color

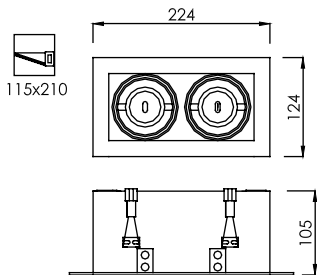

FL-3412-2

Recessed Adjustable Lightbox

LAMP

LED MR16 X 2


WATT

5W/5.5W/7W DIM

SOCKET

GX5.3

Trim color

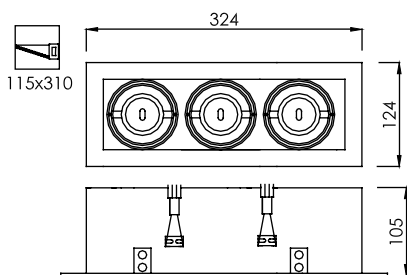

FL-3412-3

Recessed Adjustable Lightbox

LAMP

LED MR16 X 3

WATT

5W/5.5W/7W DIM

SOCKET

GX5.3

Trim color



SQUARE DOWNLIGHT



FL-3412-4

Recessed Adjustable Lightbox

LAMP


LED MR16 X 4

WATT

5W/5.5W/7W DIM

SOCKET

GX5.3

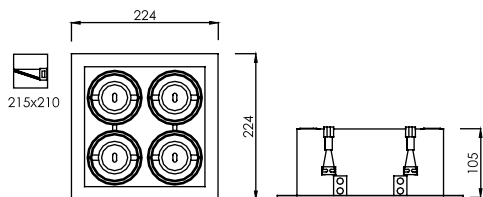

Trim color



FL-3412A-1

Recessed Adjustable Lightbox

LAMP


LED MR16 X 1

WATT

5W/5.5W/7W DIM

SOCKET

GX5.3

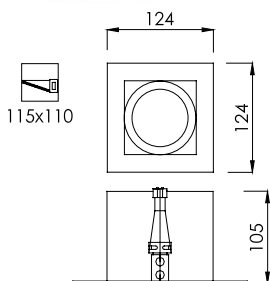

Body



FL-3412A-2

Recessed Adjustable Lightbox

LAMP


LED MR16 X 2

WATT

5W/5.5W/7W DIM


SOCKET

GX5.3

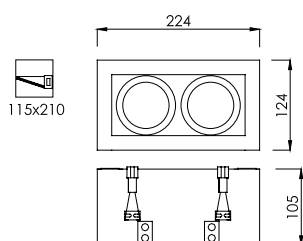

Body



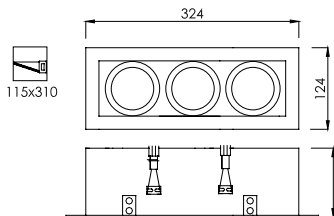


FL-3412A-3

Recessed Adjustable Lightbox

LAMP	WATT	SOCKET
LED MR16 X 3	5W/5.5W/7W DIM	GX5.3

Trim color

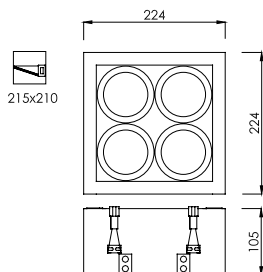


FL-3412A-4

Recessed Adjustable Lightbox

LAMP	WATT	SOCKET
LED MR16 X 4	5W/5.5W/7W DIM	GX5.3

Trim color

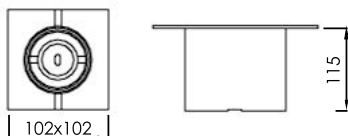

FL-34S-1

Surfaced Adjustable Lightbox

LAMP	WATT	SOCKET
LED MR16 X 1	5W/5.5W/7W DIM	GX5.3

Trim color



SQUARE DOWNLIGHT



FL-34S-2

Surfaed Adjustable Lightbox

LAMP


LED MR16 X 2

WATT

5W/5.5W/7W DIM

SOCKET

GX5.3

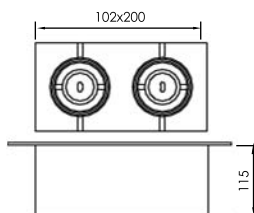

Body



FL-7420-1

Recessed Adjustable Lightbox

LAMP


LED QR111 X 1

WATT

10W/15W/20W

SOCKET

G53



Trim color



FL-7420-2

Recessed Adjustable Lightbox

LAMP


LED QR111 X 2

WATT

10W/15W/20W

SOCKET

G53

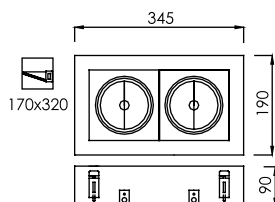


Trim color





FL-7420-3

Recessed Adjustable Lightbox

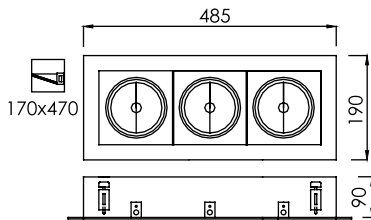

Trim color



LAMP

LED QR111 X 3

WATT

10W/15W/20W


SOCKET

G53



FL-7418-1

Recessed Adjustable Downlight



Trim Color



LAMP

LED QR111 X 1

WATT

10W/15W/20W


SOCKET

G53



FL-7418-2

Recessed Adjustable Downlight

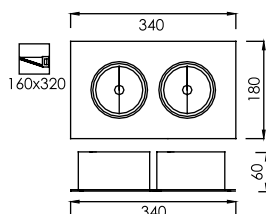

Trim Color



LAMP

LED QR111 X 2

WATT

10W/15W/20W

SOCKET

G53

SQUARE DOWNLIGHT



FL-7420S-1

Surface Adjustable Trimless Lightbox

LAMP


LED QR111 X 1

WATT

10W/15W/20W

SOCKET

G53

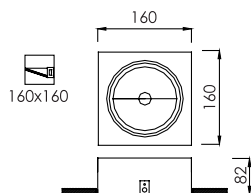

Trim color



FL-7420S-2

Surface Adjustable Trimless Lightbox

LAMP


LED QR111 X 2

WATT

10W/15W/20W

SOCKET

G53

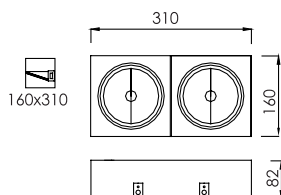

Body



FL-7420S-3

Surface Adjustable Trimless Lightbox

LAMP


LED QR111 X 3

WATT

10W/15W/20W

SOCKET

G53

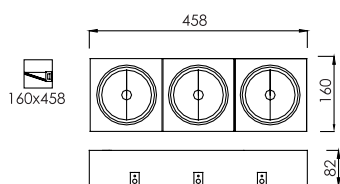

Body




ROUND

D O W N

L I G H T

ROUND DOWNLIGHT

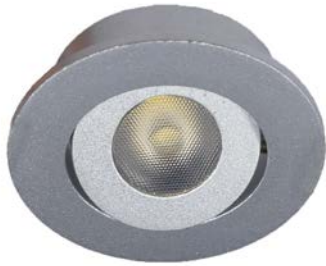


FL-DLED01

Recessed Adjustable LED Downlight

Fitting Information

Control Gear : Built-in Driver
Watt : 1 Watt
Driver : 1 x 1W

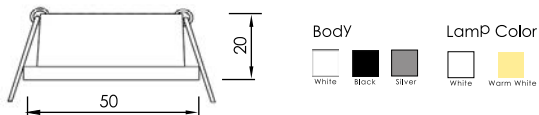


FL-DLED03

Recessed Adjustable LED Downlight

Fitting Information

Control Gear : Built-in Driver
Watt : 3 Watt
Driver : 3 x 1W




FL-DLED07

Recessed Adjustable LED Downlight

Fitting Information

Control Gear : Built-in Driver
Watt : 7 Watt
Driver : 7 x 1W

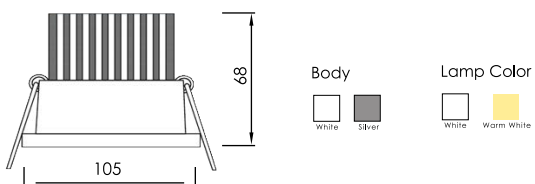


FL-DLED12

Recessed Adjustable LED Downlight

Fitting Information

Control Gear : Built-in Driver
Watt : 12 Watt
Driver : 12 x 1W

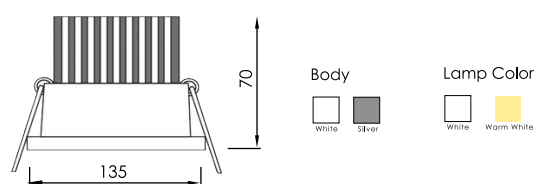





FL-DLED18

Recessed Adjustable LED Downlight

Fitting Information

Control Gear : Built-in Driver
 Watt : 18 Watt
 Driver : 18 x 1W


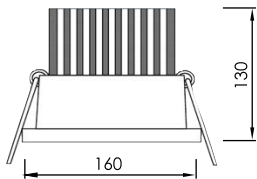


FL-DLEDS06

Recessed Slim LED Downlight

Fitting Information

Control Gear : Built-in Driver
 Watt : 6 Watt
 Driver : 6 x 1W




FL-DLEDS09

Recessed Slim LED Downlight

Fitting Information

Control Gear : Built-in Driver
 Watt : 9 Watt
 Driver : 9 x 1W




FL-DLEDS12

Recessed Slim LED Downlight

Fitting Information

Control Gear : Built-in Driver
 Watt : 12 Watt
 Driver : 12 x 1W



ROUND DOWNLIGHT




FL-DLED18

Recessed Slim LED Downlight

Fitting Information


Control Gear : Built-in Driver
 Watt : 18 Watt
 Driver : 18 x 1W



FL-2014G

Recessed Glass Cover Downlight


Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27

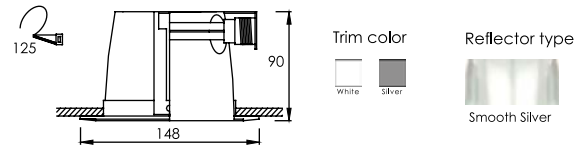

FL-2016G

Recessed Glass Cover Downlight

Lamp	Watt	Socket
LED Stick x 2	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27

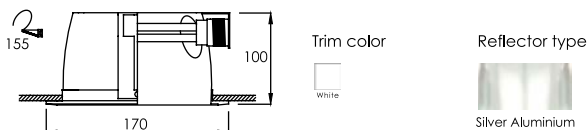

FL-2015G

Recessed Glass Cover Downlight

Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27






FL-2017G

Recessed Glass Cover Downlight



Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27

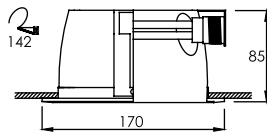

FL-2019G

Recessed Glass Cover Downlight


Lamp	Watt	Socket
LED Stick x 2	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27

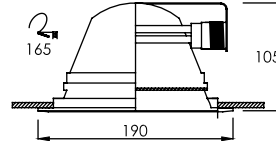

FL-104G

Recessed Glass Cover Downlight


Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27



FL-105G

Recessed Glass Cover Downlight

Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27




ROUND DOWNLIGHT



FL-106G

Recessed Glass Cover Downlight


Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27

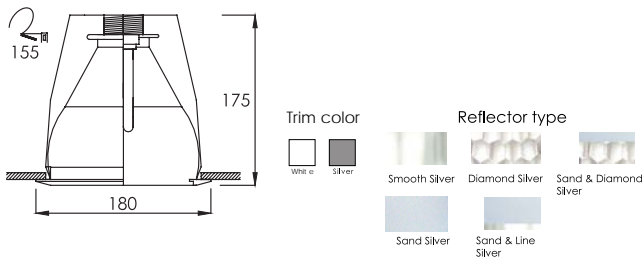

FL-107G

Recessed Glass Cover Downlight


Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27

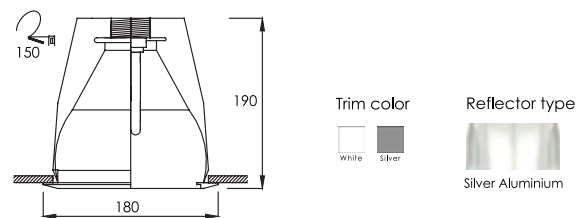

FL-20151G

Recessed Glass Cover Downlight


Lamp	Watt	Socket
LED Stick x 2	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27

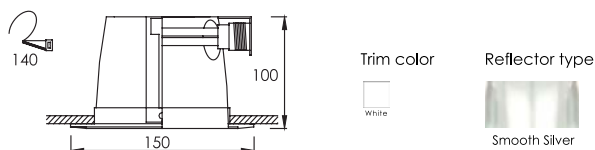

FL-20181G

Recessed Glass Cover Downlight

Lamp	Watt	Socket
LED Stick x 2	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27

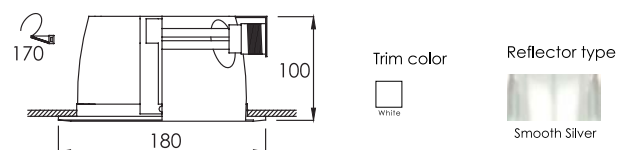




FL-2018G

Recessed Glass Cover Downlight


Lamp	Watt	Socket
LED Stick x 2	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27

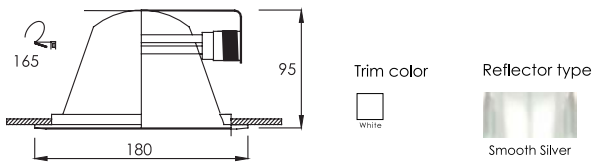

FL-105TL

Recessed Downlight

Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27

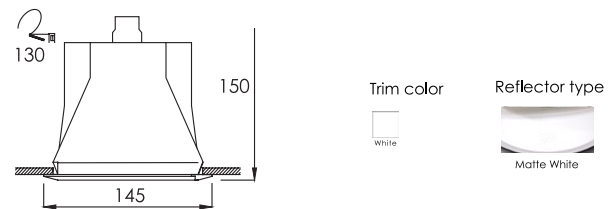

FL-104

Recessed Downlight


Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27



FL-106

Recessed Downlight

Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27

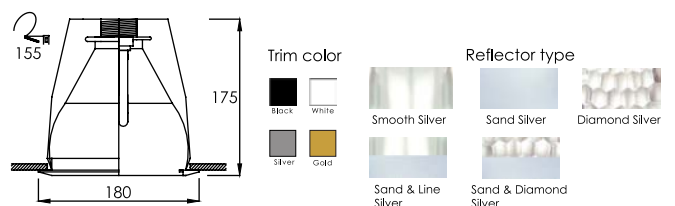


ROUND DOWNLIGHT



FL-2014

Recessed Downlight

Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27

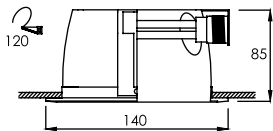

Trim color



Reflector type




Smooth Silver



FL-2016

Recessed Downlight

Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27

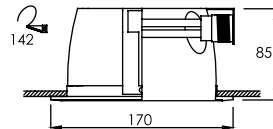

Trim color



Reflector type




Smooth Silver



FL-20191

Recessed Downlight

Lamp	Watt	Socket
LED Stick x 2	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27

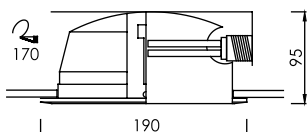

Trim color



Reflector type




Smooth Silver



FL-2024

Recessed Downlight

Lamp	Watt	Socket
LED Stick x 2	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27

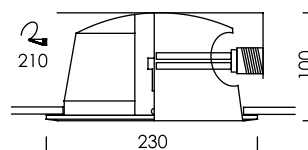

Trim color



Reflector type





Smooth Silver



FL-1014

Surface Downlight



Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27



FL-1016

Surface Downlight



Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27



FL-1016G

Surface Glass Cover Downlight


Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/13W	E27
LED Bulb x 1	7W/9W/10W/12W	E27



FL-206

Surface Downlight

Lamp	Watt	Socket
LED Stick x 2	5.5W/7.5W/9.5W/11W/13W	E27




ROUND DOWNLIGHT



FL-208

Surface Downlight


Lamp	Watt	Socket
LED Stick x 2	5.5W/7.5W/9.5W/11W/13W	E27

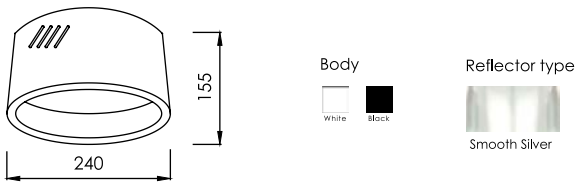

FL-307

Recessed Mini Downlight


Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3

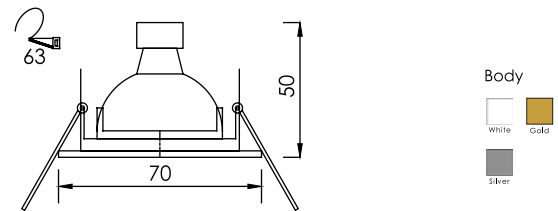

FL-308

Recessed Adjustable Mini Downlight


Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3

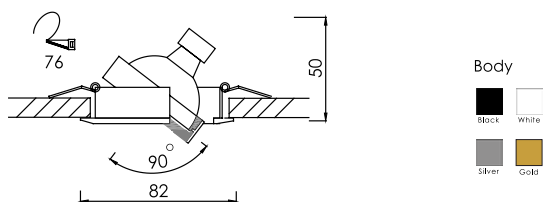

FL-305

Recessed Adjustable Mini Downlight

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3

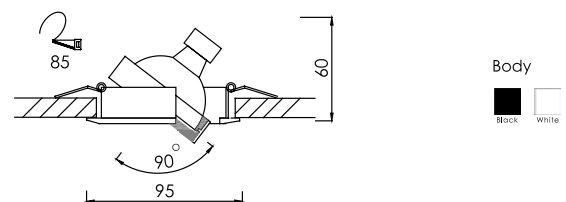




FL-309

Recessed Adjustable Mini Downlight


Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3

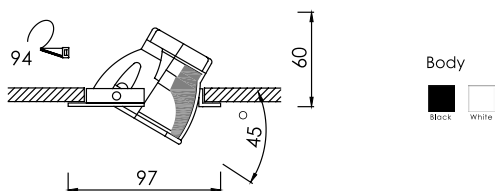

FL-3029

Recessed Adjustable Mini Downlight


Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3

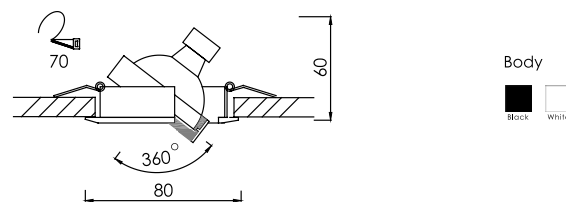

FL-3068

Recessed Adjustable Mini Downlight


Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3

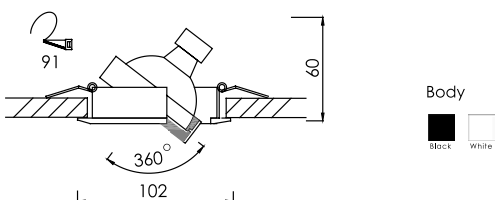

FL-3012

Recessed Adjustable Mini Downlight

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3

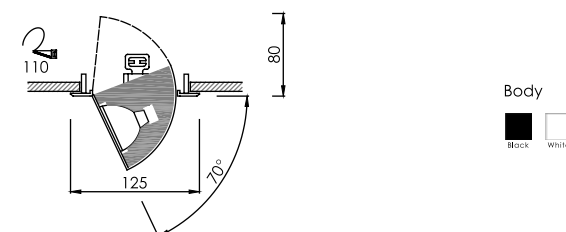


ROUND DOWNLIGHT




FL-3081

Recessed Mini Downlight

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3

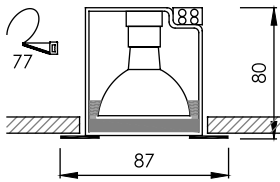


Body
 Black White

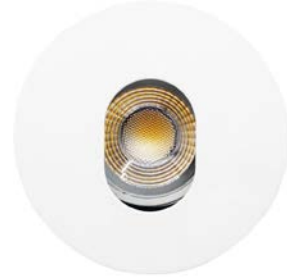

FL-3082

Recessed Adjustable Mini Downlight

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3




Body
 Black White



FL-30111

Recessed Mini Downlight

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3

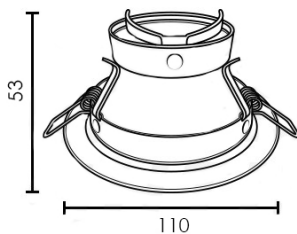


Body
 Black White



FL-30121

Recessed Adjustable Mini Downlight

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3

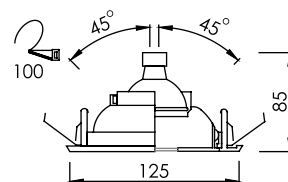

Body
 Black White


Reflector type
 Smooth Silver



FL-3026

Recessed Mini Downlight


Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3

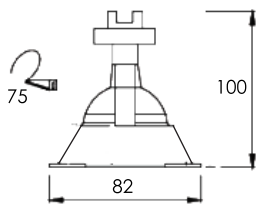

FL-3040

Recessed Mini Downlight


Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3

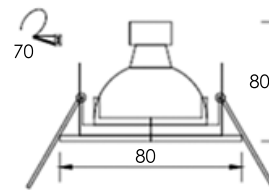

FL-3035G

Recessed Glass Cover Mini Downlight


Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3

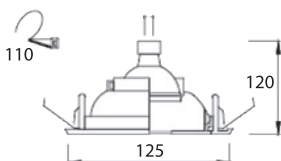

FL-3067G

Recessed Glass Cover Mini Downlight

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3

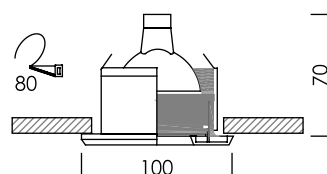


ROUND DOWNLIGHT



FL-406

Recessed Adjustable Mini Downlight


Lamp	Watt	Socket
LED MR11x 1	2W	GZ4

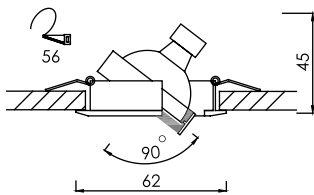

FL-7046S


Recessed Adjustable Downlight

Lamp	Watt	Socket
LED QR111 x 1	10/15W/20W	G53

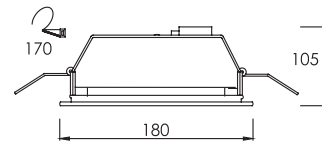

FL-30S1

Lamp	Watt	Socket
LED MR16x1	5W/5.5W/7W DIM	GX5.3



WE
SERVE
YOUR
FEELING

SPOT
LIGHT

SPOT LIGHT




FL-SP01

Spot Light

Lamp	Watt	Socket
LED MR16 x1	5W/5.5W/7W Dim	GX5.3

Type : Track/Base

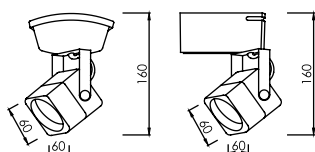

Body
 Black White




FL-SP02

Spot Light

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3

Type : Track/Base

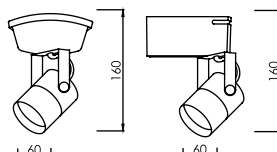

Body
 Black White
 Silver




FL-SP073

Spot Light

Lamp	Watt	Socket
LED MR16 220V x 1	5W	GU10

Type : Track/Base



Body
 Black White




FL-SP074

Spot Light

Lamp	Watt	Socket
LED MR16 220V x 1	5W	GU10

Type : Track/Base

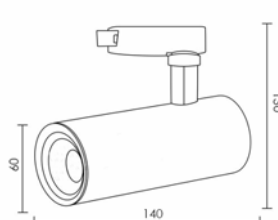

Body
 Black White




FL-SP10

Spot Light

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3

Type : Track





FL-SPP30

Spot Light

Lamp	Watt	Socket
LED Par30 x 1	9W/20W/32W/40W	E27

Type : Track/Base

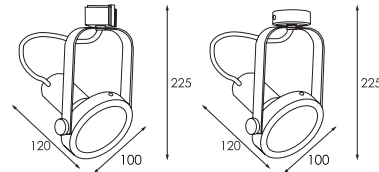


FL-SPP38

Spot Light

Lamp	Watt	Socket
LED Par38 x 1	16W	E27

Type : Track/Base

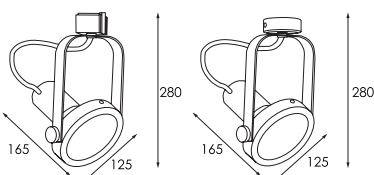


FL-SP116

Spot Light

Lamp	Watt	Socket
LED Par30 x 1	9W/20W/32W/40W	E27

Type : Track/Base

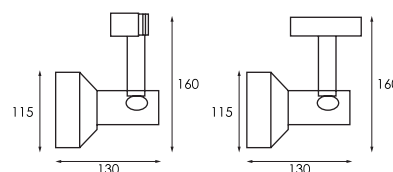


SPOT LIGHT



FL-SP678

Spot Light


Lamp	Watt	Socket
LED Par30 x 1	9W/20W/32W/40W	E27
Type : Track/Base		

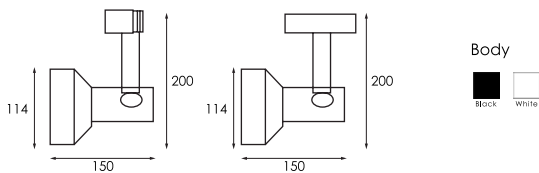

FL-SP3075

Spot Light


Lamp	Watt	Socket
LED Par30 x 1	9W/20W/32W/40W	E27
Type : Track/Base		

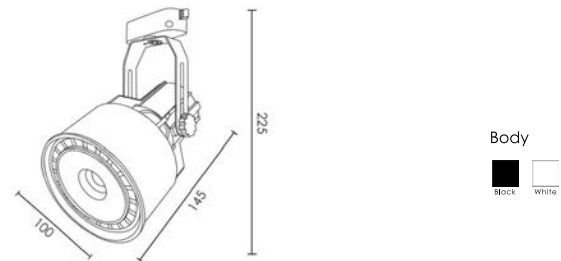

FL-SPL29

Spot Light

Control Gear	: Built-in Driver
Watt	: 3 Watt
Driver	: 1 x 3W

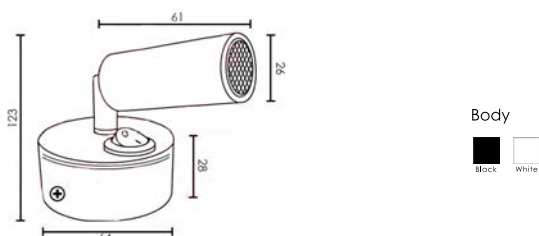

FL-SPL30

Spot Light

Control Gear	: Built-in Driver
Watt	: 3 Watt
Driver	: 1 x 3W



L I G H T
W A L L


WALL LIGHT



FL-W447small

Recessed Wall light


Control Gear : Built-in Driver
Watt : 3 Watt
Volt : 220V

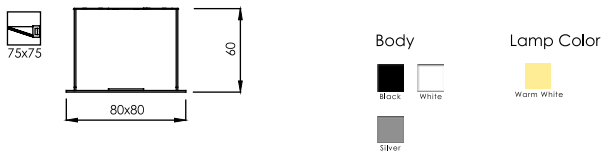

FL-W447

Recessed Wall light

Socket : G9
Watt : 3 Watt
Volt : 220V

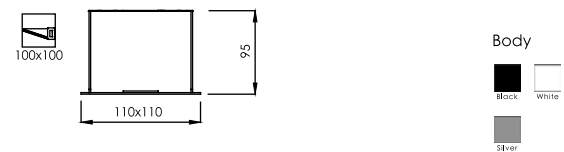

FL-W3291

Wall Light


Lamp	Watt	Socket
LED MR16 220V x 1	5W	GU10



FL-W3292

Wall Light

Lamp	Watt	Socket
LED MR16 220V x 2	5W	GU10

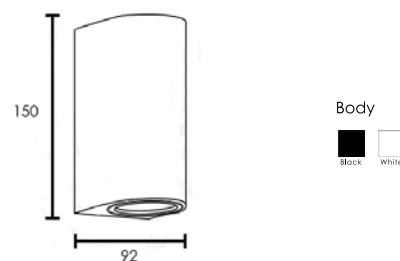




FL-W2368

Wall Light


Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W	E27
LED Bulb x 1	7W/9W/10W/12W	E27



FL-W3207

Recessed Wall Light


Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/12W	E27

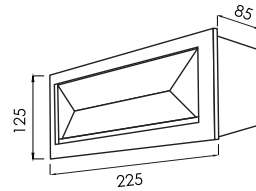

FL-W3208

Recessed Wall Light


Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/12W	E27

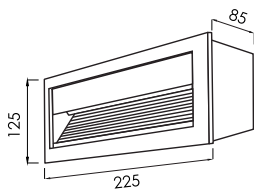

FL-W1051

Recessed Wall Light

Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/12W	E27

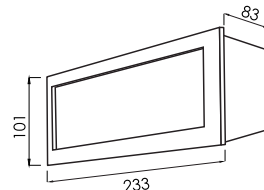


WALL LIGHT



FL-W2051

Recessed Wall Light


Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/12W	E27

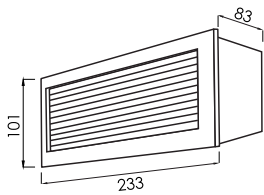

FL-W3051

Recessed Wall Light


Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/12W	E27

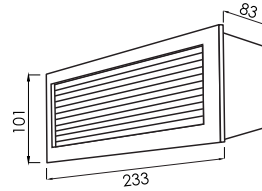

FL-W3001

Wall Light


Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/12W	E27

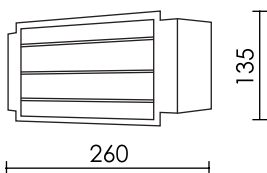

FL-W4830

Wall Light

Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/12W	E27

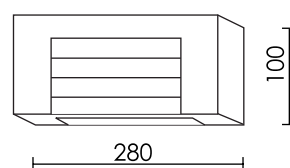




FL-W4831

Wall Light

Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/12W	E27

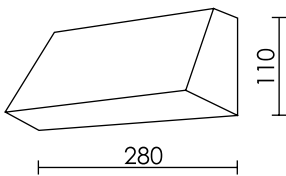


Body
 Black



FL-W4814

Wall Light

Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/12W	E27




Body
 Black



FL-W4239

Wall Light

Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/12W	E27




Body
 Silver



FL-W303

Wall Light

Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/12W	E27
LED Bulb x 1	7W/9W/10W/12W	E27



Body
 Black
 Silver


WALL LIGHT



FL-W3041

Wall Light


Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W/12W	E27
LED Bulb x 1	7W/9W/10W/12W	E27



FL-W3042

Wall Light


Lamp	Watt	Socket
LED Stick x 2	5.5W/7.5W/9.5W/11W/12W	E27
LED Bulb x 2	7W/9W/10W/12W	E27



FL-W9051

Wall Light


Lamp	Watt	Socket
LED MR16 220V x 1	5W	GU10



FL-W9052

Wall Light

Lamp	Watt	Socket
LED MR16 220V x 2	5W	GU10







FL-W901

Wall Light



Lamp	Watt	Socket
LED Bulb x 1	7W/9W/10W/12W/15W	E27
LED Par20 x 1	6W	E27



FL-W902

Wall Light


Lamp	Watt	Socket
LED Bulb x 2	7W/9W/10W/12W/15W	E27
LED Par20 x 2	6W	E27



FL-W90301

Wall Light



Lamp	Watt	Socket
LED Bulb x 1	7W/9W/10W/12W/15W	E27
LED Par30 x 1	9W/20W/32W/40W	E27



FL-W90302

Wall Light

Lamp	Watt	Socket
LED Stick x 1	5.5W/7.5W/9.5W/11W	E27
LED Par30 x 1	9W/20W/32W/40W	E27




WALL LIGHT



FL-W90381

Wall Light


Lamp	Watt	Socket
LED Bulb x 1	7W/9W/10W/12W	E27
LED Par38 x 1	13W	E27



FL-W90382

Wall Light


Lamp	Watt	Socket
LED Bulb x 2	7W/9W/10W/12W	E27
LED Par38 x 2	13W	E27

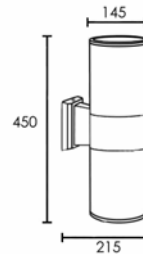

FL-W941

Wall Light



Lamp	Watt	Socket
LED Bulb x 1	7W/9W/10W/12W	E27
LED Par20 x 1	6W	E27



FL-W942

Wall Light

Lamp	Watt	Socket
LED Bulb x 2	7W/9W/10W/12W	E27
LED Par20 x 2	6W	E27






FL-W4086

Wall Light

Lamp	Watt	Socket
LED Bulb x 1	7W/9W/10W/12W	E27




Body
■
Black



FL-W4087

Wall Light

Lamp	Watt	Socket
LED Bulb x 1	7W/9W/10W/12W	E27



Body
■
Black

LANDSCAPE

L I G H T


LANDSCAPE LIGHT



FL-L60

Under Water Light

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3



Body
Stainless


IP Rating : 68
Specification : Stainless Steel Fixture. / Tempered Glass.
 / High Temperature silicon rubber seal. / Not for use in swimming pools, spas, Be sure the water in natural water.



FL-L32

Garden Light

Lamp	Watt	Socket
LED Par38 x 1	13W	E27



Body
Black


IP Rating : 54
Specification : For Spike / Die cast Aluminum fixture.
 / Weather-proof rubber seal.



FL-L30

Garden Light

Lamp	Watt	Socket
LED Par38 x 1	13W	E27



Body
Black


IP Rating : 54
Specification : For Base. / Die cast Aluminum fixture.
 / Weather-proof rubber seal.



FL-L24

Garden Light

Lamp	Watt	Socket
LED Par38 x 1	13W	E27



Body
Black

IP Rating : 64
Specification : Stainless Steel Fixture. / Tempered Glass.
 / High Temperature silicon rubber seal. / Not for use in swimming pools, spas, Be sure the water in natural water.


LANDSCAPE LIGHT



FL-L25

Garden Light

Lamp	Watt	Socket
LED Par38 x 1	13W	E27



Body
Black


IP Rating : 54
Specification : Anti-glare Hood with Base / Die cast Aluminum fixture.
 / Weather-proof rubber seal.



FL-L44

Garden Light

Lamp	Watt	Socket
LED Par38 x 1	13W	E27



Body
Black


IP Rating : 54
Specification : Anti-glare Hood with Spike / Die cast Aluminum fixture.
 / Weather-proof rubber seal.



FL-L45

Garden Light

Lamp	Watt	Socket
LED Par38 x 1	13W	E27



Body
Black


IP Rating : 54
Specification : Anti-glare Hood with Base / Die cast Aluminum fixture.
 / Weather-proof rubber seal.



FL-L82

Garden Light

Lamp	Watt	Socket
LED Par38 x 1	13W	E27



Body
Black Silver


IP Rating : 65
Specification : Anti-glare Hood with Base / Die cast Aluminum fixture.
 / Weather-proof rubber seal.



FL-L83

Garden Light

Lamp	Watt	Socket
LED Par38 x 1	13W	E27




IP Rating : 65
Specification : Anti-glare Hood with Spike / Die cast Aluminum fixture.
 / Weather-proof rubber seal.



FL-L57

Garden Light

Lamp	Watt	Socket
LED Par38 x 1	13W	E27




IP Rating : 54
Specification : For Spike / Die cast Aluminum fixture.
 / Weather-proof rubber seal.



FL-L58

Garden Light

Lamp	Watt	Socket
LED Par38 x 1	13W	E27




IP Rating : 65
Specification : For Spike / Die cast Aluminum fixture.
 / Weather-proof rubber seal.



FL-L110

Garden Light

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3



IP Rating : 65
Specification : Die cast Aluminum fixture. Tempered glass.
 / High Temperature Silicone rubber seal. / Stainless screw.
 / Acidic/Alkaline-resistant finish.


LANDSCAPE LIGHT



FL-L210

Garden Light

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3



Body
Black

IP Rating : 65


Specification : Die cast Aluminum fixture. Tempered glass.
/ High Temperature Silicone rubber seal. / Stainless screw.
/ Acidic/Akalkine-resistant finish.



FL-L310

Garden Light

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3



Body
Black

IP Rating : 65


Specification : Die cast Aluminum fixture. Tempered glass.
/ High Temperature Silicone rubber seal. / Stainless screw.
/ Acidic/Akalkine-resistant finish.



FL-L1103

Garden Light

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3



Body
Black

IP Rating : 65


Specification : Die cast Aluminum fixture. Tempered glass.
/ High Temperature Silicone rubber seal. / Stainless screw.
/ Acidic/Akalkine-resistant finish.



FL-L2103

Garden Light

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3



Body
Black

IP Rating : 65


Specification : Die cast Aluminum fixture. Tempered glass.
/ High Temperature Silicone rubber seal. / Stainless screw.
/ Acidic/Akalkine-resistant finish.



FL-L3103

Garden Light

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3



IP Rating : 65


Specification : Die cast Aluminum fixture. Tempered glass / High Temperature Silicone rubber seal. / Stainless screw / Acidic/Akaline-resistant finish.



FL-U43

In-Ground Uplight

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3



IP Rating : 67


Specification : Die cast Aluminum fixture. / Tempered glass / Stainless screw.



FL-U02

In-Ground Uplight

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3



IP Rating : 67


Specification : Die cast Aluminum fixture. / Tempered glass Diffuser / Stainless screw.



FL-U03

In-Ground Uplight

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3



IP Rating : 67

Specification : Die cast Aluminum fixture. / Tempered glass Diffuser / Stainless screw.


LANDSCAPE LIGHT



FL-U03ADJ

In-Ground Adjustable Uplight

Lamp	Watt	Socket
LED MR16 x 1	5W/5.5W/7W Dim	GX5.3



Body



Glass




IP Rating : 67
Specification : Die cast Aluminum fixture. / Tempered glass Diffuser / Stainless screw.



FL-U04

In-Ground Uplight

Lamp	Watt	Socket
LED Bulb x 1	7W/9W/10W/12W/15W	E27
LED Par20 x 1	6W	E27



Body



Glass




IP Rating : 67
Specification : Die cast Aluminum fixture. / Tempered glass Diffuser / Stainless screw.



FL-U11

In-Ground Uplight

Lamp	Watt	Socket
LED Par20 x 1	6W	E27
LED Par30 x 1	9W/20W/32W/40W	E27



Body




IP Rating : 67
Specification : Die cast Aluminum fixture. / Tempered glass Diffuser / Stainless screw.



FL-UP1

In-Ground Uplight

Lamp	Watt	Socket
LED Bulb x 1	7W/9W/10W/12W/15W	E27
LED Par20 x 1	6W	E27
LED Par30 x 1	9W/20W/32W/40W	E27
LED Par38 x 1	13W	E27



Body



IP Rating : 67
Specification : Die cast Aluminum fixture. / Tempered glass Diffuser / Stainless screw.




FL-UL64

LED Uplight

Fitting Information

Control Gear : Built-in Driver
Watt : 1 Watt
Volt : 220V
IP Rating : 67



Body
Silver

Lamp Color
Warm White




FL-UL81

LED Uplight

Fitting Information

Control Gear : Built-in Driver
Watt : 2 Watt
Volt : 220V
IP Rating : 67



Body
Black

Lamp Color
Warm White




FL-UL82

LED Uplight

Fitting Information

Control Gear : Built-in Driver
Watt : 2 Watt
Volt : 220V
IP Rating : 67




Body
Black

Lamp Color
Warm White

LED

STRIP E

LED STRIPE




FL-LEDNEON

LED Neonflex

Fitting Information

Watt : 9W Per M.
 Volt : 220V
 Lamp Color : Red/Yellow/White/Green/Blue/Warm-White
 120LED Per M.
 Cuttable : 1 M
 Maximum length : 20 M.

- Plug
- Connector
- Clip

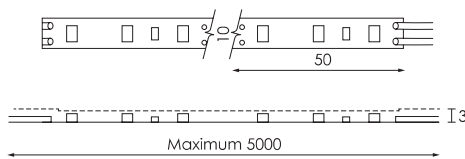


FL-LED SSR60

Small SMD LED Ribbon 60 Pcs.

Fitting Information

Specification : 60 Pcs. Per 1 M.
 Watt : 6W Per M.
 Volt : 12V
 Lamp Color : Red/Yellow/White/Green/Blue
 /Day-light/Cool-White/Warm-White
 Beam Angle : 120 Degrees
 Cuttable : 5 CM
 Maximum length : 5 M. Per line

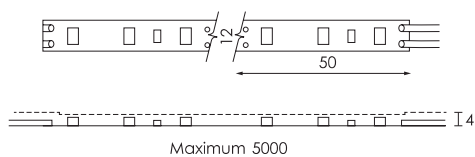


FL-LED BSR60

Big SMD LED Ribbon 60 Pcs.

Fitting Information

Specification : 60 Pcs. Per 1 M.
 Watt : 14.4W Per 1 M.
 Volt : 12V/ 24V
 Lamp Color : Red/Yellow/White/Green/Blue
 /Day-light/Cool-White/Warm-White
 Beam Angle : 120 Degrees
 Cuttable : 12V/5CM , 24V/10CM
 Maximum length : 5 M. Per line

LED STRIPE

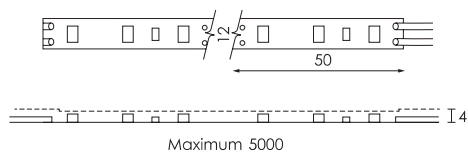


FL-LED BSR60-IP65

Big SMD LED Ribbon 60 Pcs.

Fitting Information

Specification : 60 Pcs. Per 1 M.
 Watt : 14.4W Per 1 M.
 Volt : 12V/ 24V
 Lamp Color : Daylight/Cool-White/Warm-White
 Beam Angle : 120 Degrees
 Cuttable : 12V/5CM , 24V/10CM
 Maximum length : 5 M. Per line

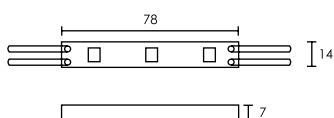


FL-LED MD3

Big SMD LED Ribbon 60 Pcs.

Fitting Information

Specification : 3 Pcs. Per 1 Pc.
 Watt : 0.72W Per 1Pc.
 Volt : 12V
 Lamp Color : Red/Yellow/White/Green/Blue/Warm-White
 Beam Angle : 120 Degrees
 Cuttable : 5 CM
 Maximum length : 20 Pcs. Per 1 line

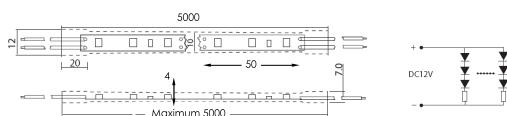

FL-LED RGB12V

Big SMD RGB LED Ribbon 60 Pcs.

Fitting Information

Specification : 60 Pcs. Per 1 M.
 Watt : 14.4W Per 1 M.
 Volt : 12V/ 24V
 Lamp Color : RGB (Changing Color)
 Beam Angle : 120 Degrees
 Cuttable : 12V/5CM , 24V/10CM
 Maximum length : 5 M. Per 1 line / 15 M Per 1 Control
 Unlimit Control per 1 circuit
 Remark : Using with RGB Controller 2,4GHZ with Wifi, Smart phone


Controller RGB :
 Controller RGB has many manual functions with remote control (fix and changing color programs) and also can adjust speed of each programs

Working temperature : 20 to 60 c
 Input current : 12V DC
 Output power : less than 288W
 Maximum length per one control : 15 M Per 1 Control


Aluminum LED Profile




AP1 Super slim 8mm recessed aluminum LED profile with flange
: PMMA opal matte diffuser




AP2F Super slim 8mm aluminum LED profile with flange
: PMMA opal matte diffuser




AP2T aluminum LED profile with lens
: PMMA opal matter diffuser



AP3F 15mm recessed aluminum LED profile with flange
: PMMA opal matte diffuser




AP4F 15mm aluminum LED profile with flange
: PMMA opal matte diffuser




AP6 Corner aluminum LED profile
: PMMA opal matte diffuser



APB40 Big size Ceiling/Pendant/Floor aluminum LED profile with flange
: PMMA opal matte diffuser



APB41 Big size Ceiling/Pendant/Floor aluminum LED profile with flange
: PMMA opal matte diffuser



Basic Lighting Knowledge


Lumen = Luminous Flux (lm)



Lumen is the international (SI) unit of luminous flux, a measure of overall light emitted by a light source.

Quantity	Symbol	SI unit	Abbr.	Notes
Luminous flux	F	Lumen (=cd sr)	lm	also called luminous power


Candela = Luminous Intensity (cd)

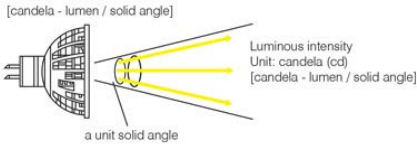

Candela is the international (SI) unit of luminous intensity, a measure of light emitted by a light source in a particular direction. Any given light source will have different luminous intensities in different directions considered.


Quantity	Symbol	SI unit	Abbr.	Notes
Luminous Intensity	IV	candela (= lm/sr)	cd	an SI Base Unit
Luminance	LV	candela per square metre	cd/m2	

Beam Angle (Unit: degree)

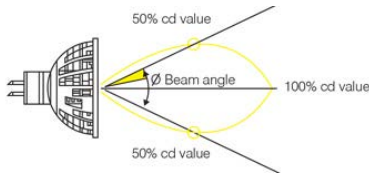

Beam angle is the angle between two directions for which the luminous intensity is 50% of the maximum intensity as measured in a plan through the nominal beam centreline. Beam angle of a bulb gives an idea of how the light beam spreads away from the beam centre.

LUX = Illuminance (lx)

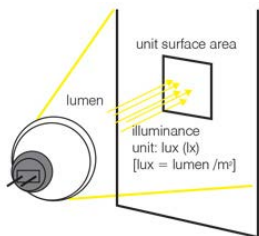

Lux is the international (SI) unit of illuminance, a measure of light arriving at a surface, 1 lumen per square foot equals 1 foot-candle, while 1 lumen per square meter equals 1 lux. [lux = lumen/m²]

Quantity	Symbol	SI unit	Abbr.	Notes
Illuminance	EV	candela (= lm/sr)	lx	Used for light incident from a surface
Luminous emittance	MV	candela per square metre	lx	Used for light emitted from a surface

Colour Temperature/Correlated Colour Temperature (CCT)



A black-body radiator will have a different colour when it is heated up to different temperatures (in kelvin). The Temperature at which the heated black-body radiator matches the colour of the light source is the colour temperature of the light source.

Dimmability

Not all lighting products are designed for dimming function. Dimming a non-dimmable LED lighting product will cause un-predictable result and may affect the life time of the products.

Colour Rendering Index (CRI)



Colour rendering index ranges from 0-100, measures a light source's ability to reproduce the colour of various objects being lit by a reference light source, black body radiator (CRI=100). (This is generally considered inversely proportional to the Colour temperature.) Note: for LED light sources the warmer the colour temperature the more natural skin colour is achieved. (A colour temperature of 2700K is closest to output of a typical 50W halogen or incandescent globe. The cooler the colour temperature the more blue/grey skin colour becomes).

FEEL ENTERPRISE CO.,LTD.

58 Soi Petchkasem 15 Yak 9, Petchkasem Road,
Wat Thapra, Bangkokyai, Bangkok Thailand 10600

Tel : (662)4577013,4579022 Email : info@feel-lighting.com
www.feel-lighting.com